

Quality Since
1974

Master CATALOGUE Issue 2



Profiles & Extrusions



Automotive Hose



Moulded Rubber
Products



Matting



Clips & Fasteners



www.rsp.net.au

CONTENTS

Our History 3

Introduction 4

Profiles & Extrusions 5

Automotive Hose 35

Moulded Rubber Products 51

Matting 67

Merchandisers 73

Clips & Fasteners 77

Quick Find Index 79

Contact Information 84

OUR HISTORY

RSP Automotive & Industrial began life as Rare Spares in 1974, supplying new and refurbished parts for 48-FJ Holdens. The business started in a residential basement in one of Melbourne's leafy suburbs and then quickly moved to a small factory in Reservoir. The business expanded rapidly and before long, larger premises were required.

The Company moved to Brunswick where it started a vigorous manufacturing program, both locally and abroad, and by 1986 Rare Spares had added Ford parts to its range. In addition, an Australasia wide distributor network was established to sell and market the ever increasing product range. Also in 1986, the Company started its diversification program with the marketing of its products to OEM (Original Equipment Manufacturers) companies, and the development of an industrial rubber product range.

In 1990, Rare Spares took one of what would be many huge steps, with the building of its modern and spacious new warehouse and head office facility at Campbellfield, situated in Melbourne's far northern suburbs. This gave the Company much needed space to rapidly expand its range as well as finally being able to operate in a new and efficient office complex.

Furthermore, in 1998, Rare Spares became early achievers of the automotive QS9000 quality accreditation program. 1998 was a big year for Rare Spares as the Company commenced its own metal pressing business after the successful acquisition of a Newcastle based manufacturer.

The new metal pressing facility was set up in separate premises and became immediately successful.

In 1999, buoyed by the success of the many new facets of Rare Spares, the Company registered the secondary name of RSP Australia Pty Ltd, which at the time better reflected the association with OEM and Industrial customers. Rare Spares remained the name associated with the traditional manufacture and supply of automotive parts.

As RSP Australia headed towards the new millennium it continued to add diverse but associated divisions to the Company, one being an information technology department, launched as RSP Systems in 2000.

As business boomed and RSP Australia grew, space, again, became a problem. At the start of 2006, the Company continued its expansion with the purchase of a large modern secondary warehouse in Campbellfield, to house products

for the Company's increasing OEM and industrial rubber business.

Also heralding in 2006 was the move to an overall company name and brand that better recognised the diversity of the company whilst harnessing the synergies between each division. In mid 2006, RSP Automotive & Industrial was launched with a new logo and identity that unmistakably represents every aspect of the business; automotive OEM, clips & fasteners, information technology, metal pressing, moulded rubber products, hose products and the Rare Spares branded automotive aftermarket parts and accessories.



INTRODUCTION

For over 30 years, RSP Automotive & Industrial and Rare Spares have offered their growing customer base a very extensive range of products and services. The diverse Company specialises in industrial rubber products, pressed metal products, information technology, clips and fasteners, automotive OEM products, remanufactured parts for the automotive restoration market, limited run plastic mouldings and much more. The emphasis is on both quality and service and this instils a level of confidence for each and every customer that RSP Automotive & Industrial will consistently satisfy their requirements.

In all company ventures, RSP Automotive & Industrial pride themselves on providing exceptional quality products, as well as building successful business and consumer relationships. This passion and drive leads to continual success and these attributes dictate the future of the Company.

RSP Automotive & Industrial now directly employs 64 staff in its five Melbourne locations and has grown into a multi million dollar operation. The Company has very strong policies relating to the wellbeing of all staff members, which includes staff promotion from within, wherever possible. The Company maintains an

enviable record of having a high number of employees who have been with the Company for over 10, 15 or even 20 years.

A testament to the values of RSP Automotive & Industrial.

Profiles & Extrusions



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.



Elastomer Details **7-8**

| | |
|-----------------------|---|
| Material Summary..... | 7 |
| Properties..... | 8 |

Bridgestone Cross Reference **9-10**

Pinchweld **11-15**

| | |
|-------------------------------------|----|
| EPDM Rubber & Sponge..... | 11 |
| EPDM Rubber & Sponge-Schlegel | 13 |
| PVC/EPDM Sponge..... | 14 |

Rubber Extrusion **16-24**

| | |
|--------------------------------|----|
| EPDM Sponge..... | 16 |
| EPDM Sponge (Rectangular)..... | 19 |
| EPDM Sponge (Cord)..... | 20 |
| Solid | 20 |
| H Seals..... | 24 |
| P & E Seals | 24 |

Glazing Channels & Locking Strips **25**

Glass Channel **26-31**

| | |
|----------------------|----|
| Metal Inserted | 26 |
| Flocked Rubber | 30 |

Roller Door Seals **31**

Mylar Windscreen Insert Strip **31**

PVC Extrusion **32**

| | |
|--------------------|----|
| Fender Piping..... | 32 |
| Fender Flare | 32 |

Self Adhesive Neoprene Sponge Tape **33**

Tank Straps **34**

Wheel Arch Flares **34**

ELASTOMER MATERIAL - SUMMARY

| No. | International abbreviation | DMM | Chemical Name | Trade Name | Specific Properties | Guide line forttemperature range |
|-----|----------------------------|------|---|--------------------------|--|----------------------------------|
| 1 | NR | 3.5 | | Natural rubber | High mechanical strength and elasticity | -40 TO +80 C |
| 2 | SBR | 4- | styrene-butadiene rubber | Buna | Good resistance to W~ in alkalis and WM | -40 TO +80 C |
| 3 | IR | 5- | Isoprene rubber | Natsyn | Very good mechanical strength and elasticity | -50 TO +80 C |
| 4 | EPDM | 5- | Ethylene propylenedi-ene terpolymer | Kaftan Buna | Very good ozone resistance e.g. used for washing and dish washer machine gaskets | -40 TO +140 C |
| 5 | PNR | 8 | Polynorborene rubber | Norsorex | Can be made very soft | -40 TO +80 C |
| 6 | NBR ("Nitrile") | 7- | Acrylonitrile butadiene rubber | Parbunan | Good swelling resistance especially in allphatic hydrocarbons oil and grease | -30 TO +120 C |
| 7 | 11R | 7- | Isobutene Isoprene rubber | Polysarbutyl | Little gas permeability. High damping behaviour | -30 TO +140 C |
| 8 | CR | 8.5 | Chloroprene rubber | Baypren Neoprene | Non flammable, good weathering resistance | -30 TO +120 C |
| 9 | CSM | 8.5 | Chloro sulphenyl polythene | Hypalon | Swelling resistance in combination with good ozone and weathering resistance | -30 TO +130 C |
| 10 | ECO | 14- | Epichlohydrin copolymer | Hydrin Herclor | Good oil and heat: resistance, good damping behaviour | -30 TO +130 C |
| 11 | ACM | 16- | Ethyl acrylate copolymer | Hycar | Excellent: resistance in oil at higher temperatures | -25 TO +140 C |
| 12 | SI | 18- | Silicone rubber | Silopren Silastic | Thermal resistance (dry heat), good dielectric properties | -60 TO +200 C |
| 13 | LSR | 23- | Liquid Silicone rubber | Silopren Silastic | Thermal resistance (dry heat), good dielectric properties | -60 TO +200 C |
| 14 | HNBR | 60- | Hydrogenerated acrylonitrile butadiene rubber | Therban | Very good resistance against oils containing additives, very good hot air resistance, good low temperature behaviour | -30 TO +150 C |
| 15 | PPM normal (Fluor Polymer) | 120- | Vinylidene fluoride-hexafluoropropylene copolymer | Viton Fluorel Tecnoflon | High temperature resistance & very good chemical stability | -25 TO +230 C |
| 16 | FPM M 15 (Fluor Polymer) | 190- | Vinylidene fluoride-hexafluoropropylene copolymer | Viton Fluorel Technoflon | High temperature resistance & very good chemical stability additionally little swelling in M-15 fuel and lead- free fuel | -25 TO +230 C |
| 17 | FVMQ | 250- | Fluor Silicone | Silastic | Very good swelling resistance in oil and fuels with good cold flexibility | -60 TO +200 C |

PROPERTIES OF ELASTOMERS

| Properties Chemical Name | Natural Rubber Polyisoprene | SBR or GR-S or Buna S Buladiene styrene | Butyl Isobutylene isoprene | Nitrile (Buna N) Butadiene acrylonitrile | Neoprene Chloroprene | Silicone Polysiloxane polymer | EPDM Rubber Ethylene Propylene polymer |
|---|-----------------------------------|--|----------------------------------|---|-------------------------|-------------------------------------|---|
| Material Designation (ASTM 0-2000.SAE J200 Classification)1981 | AA | AA | BA | BF,BG,BK, CH | BC,BE | FE | BA,CA,DA |
| Tensile Strength PSI | Over 3000 | Over 2000 | Over 2000 | Over 2000 | Over 3000 | Below 1500 | Over 2000 |
| Hardness Range (Durom A) | 30-90 | 40-90 | 40-75 | 40-95 | 40-95 | 50-80 | 40-90 |
| Specific Gravity Polymer | 0.93 | 0.94 | 0.92 | 1 | 1.23 | 1.14 2.05 | 0.86 |
| Adhesion to Metals | Excellent | Excellent | Good | Excellent | Excellent | Excellent | Fair |
| Adhesion to Fabrics | Excellent | Good | Good | Good | Excellent | Excellent | Good |
| Tear Resistance | Very Good | Fair | Good | Fair | Good | Poor | Fair |
| Abrasion Resistance | Excellent | Good to Excellent | Good | Good | Excellent | Poor | Good to Excellent |
| Compression Set | Good | Good | Fair | Good | Fair to Good | Fair | Good |
| Rebound | | | | | | | |
| Cold | Excellent | Good | Poor | Good | Good | Excellent | Excellent |
| Hot | Excellent | Good | Very Good | Good | Very Good | Excellent | Excellent |
| Dielectric Strength | Excellent | Excellent | Excellent | Poor | Very Good | Good | Outstanding |
| Electrical Insulation | Good to Excellent | Good to Excellent | Good to Excellent | Poor | Fair to Good | Excellent | Outstanding |
| Permeability to Gases | Fairly low | Fairly low | Very Low | Low | Low | Fairly Low | Fairly Low |
| Acid Resistance | | | | | | | |
| Dilute | Fair to Good | Fair to Good | Excellent | Good | Excellent | Excellent | Excellent |
| Concentrated | Fair to Good | Fair to Good | Good | Good | Good | Fair | Good |
| Solvent Resistance | | | | | | | |
| Aliphatic hydrocarbons | Poor | Poor | Poor | Excellent | Fair to Good | Poor | Poor |
| Aromatic hydrocarbons | Poor | Poor | Poor | Good | Fair | Poor | Poor |
| Oxygenated (Ketones, etc) | Good | Good | Good | Poor | Poor to Fair | Fair | Excellent |
| Lacquer solvents | Poor | Poor | Fair to Good | Fair | Poor | Poor | Fair to Good |
| Resistance to | | | | | | | |
| Swelling in Lubricating oil | Poor | Poor | Poor | Very Good | Good | Fair | Poor |
| Oil and gasoline | Poor | Poor | Poor | Excellent | Good | Fair | Poor |
| Animal and Vegetable oils | Poor to Good | Poor to Good | Very Good | Very Good | Good | Good to Excellent | Good to Excellent |
| Water absorption | Very Good | Good to very good | Very Good | Good | Good | Excellent | Excellent |
| Oxidation | Good | Fair | Excellent | Good | Very Good | Excellent | Excellent |
| Ozone | Poor | Poor | Excellent | Fair | Very Good | Excellent | Outstanding |
| Sunlight aging | Poor | Poor | Very Good | Poor | Very Good | Excellent | Outstanding |
| Heat aging | Fair | Fair to Good | Very Good | Good | Good | Outstanding | Excellent |
| Low temperature | Very Good | Very Good | Good | Fair to Good | Good | Outstanding | Excellent |
| Flame | Poor | Poor | Poor | Poor | Good | Fair to Good | Poor to Good |

BRIDGESTONE CROSS REFERENCE

| Description | BSTG Number | New BSTG Number | RSP Number |
|--|------------------|-----------------|-------------------|
| SOLID RUBBER EXTRUSIONS | | | |
| Edge Protector | 038612 (R32) | 5300001 | 39-8806 |
| Glazing Channel - (with locking strip) | 040279 (R20) | 5300002 | 39-8517R |
| Glazing Channel - (with locking strip) | 291719 | 5300128 | 39-8846 |
| GLASS RUN CHANNELS | | | |
| Flocked Channel | 288209 (GRC508) | 5300112 | 39-622 |
| Flocked Channel | 292576 (GRC1150) | 5300174 | SS1150-30M |
| Flocked Channel | 292577 (GRC2) | 5300175 | 39-068R |
| Flocked Channel | 293089 (GRC401) | 5300211 | 39-8848 |
| Flocked Channel | 293402 (GRC11) | 5300251 | 39-8785 |
| Flocked Channel | 4018701 (GRC12) | 5300270 | 64-193 |
| PINCHWELD | | | |
| Pinchweld - Small Bulb Black | 255711 | 5300071 | 60-055N |
| Pinchweld - Black Small | 257386 | 5300072 | 66-037 |
| Pinchweld - Boot Seal | 263376 | 5300091 | 66-016 |
| Pinchweld - Black | 269464/224881 | 5300966 | 66-8295 |
| Pinchweld - Large Bulb Black | 283879 | 5300107 | 60-054 |
| Pinchweld | 4348101 | 5300852 | 66-017 |
| Pinchweld - White | 287235 | 5300111 | 66-8296 |
| Pinchweld - | Grey Double Bulb | 5301179 | 39-8844 |
| BELTLINE SECTIONS | | | |
| Beltline Section 18mm x 8mm | 4303401 | | MA10 |
| Beltline Section 20mm x 12mm | 4247401 | | MA5-2.4 |
| Beltline Section 26mm x 15mm | 4303501 | | MA11 |
| DOOR SEAL EXTRUSIONS | | | |
| Sponge Extrusion Arrow Head 18mm x 16mm | 263384 | 5300092 | 39-615 |
| Sponge Extrusion Bulb Seal 17mm x 13.5mm | 4236101 | 5300566 | 39-620 |
| Sponge Extrusion Bulb Seal 17mm x 17mm | 293347 | 5300244 | 39-618 |
| Sponge Extrusion Bulb Seal 29mm x 16mm | 291569 | 5300115 | 31-044R |

BRIDGESTONE CROSS REFERENCE

| Description | BSTG Number | New BSTG Number | RSP Number |
|---------------------------------------|-------------|-----------------|----------------|
| EPDM SPONGE EXTRUSIONS | | | |
| Sponge Extrusion 5mm x 13mm | 196303 | | P485 |
| Sponge Extrusion 6mm x 19mm | 196311 | | P402 |
| Sponge Extrusion 10mm x 6mm | 261651 | 5300083 | 60-8758 |
| Sponge Extrusion 10mm x 13mm | 261677 | 5300085 | P406 |
| Sponge Extrusion 13mm x 13mm | 261586 | 5300076 | P408 |
| Sponge Extrusion 13mm x 6mm | 261644 | 5300082 | P401 |
| Sponge Extrusion 13 x 16 Irregular | 249169 | 5300063 | 39-159R |
| Sponge Extrusion 19mm x 10mm | 261628 | 5300080 | 60-8757 |
| Sponge Extrusion 19mm x 13mm | 261610 | 5300079 | P410 |
| Sponge Extrusion 19mm x 19mm | 261578 | 5300075 | P423 |
| Sponge Extrusion 19mm x 6mm | 261685 | 5300086 | P402 |
| Sponge Extrusion 25mm x 10mm | 261602 | 5300078 | P487 |
| Sponge Extrusion 25mm x 13mm | 261594 | 5300077 | P411 |
| Sponge Extrusion 25mm x 19mm | 261560 | 5300074 | P427 |
| Sponge Extrusion 25mm x 25mm | 261693 | | P428 |
| Sponge Extrusion 25mm x 5mm | 275560 | 5300104 | P496 |
| Sponge Extrusion 25mm x 6mm | 261636 | 5300081 | P403 |
| Sponge Extrusion 25mm x 6mm Bull Nose | 147215 | 5300015 | 39-416R |
| Sponge Extrusion 32mm x 10mm | 291714 | 5300126 | P407 |
| Sponge Extrusion 32mm x 6mm | 291712 | 5300125 | P431 |
| Sponge Extrusion 38mm x 13mm | 291710 | 5300124 | P412 |
| Sponge Extrusion 38mm x 6mm | 291716 | 5300127 | P404 |
| Sponge Extrusion 50mm x 13mm | 269571 | 5300098 | P414 |
| Sponge Extrusion 50mm x 6mm | 222539 | 5300054 | P488 |
| Sponge Extrusion 6mm x 6mm | 261669 | 5300084 | P400 |
| Sponge Extrusion 8mm x 6mm | 229328 | 5300057 | 60-8759 |
| Sponge Extrusion Round 10mm OD | 227603 | 5300056 | P138 |
| Sponge Extrusion Round 15mm OD | 249201 | 5300065 | P144 |

PINCHWELD - EPDM RUBBER & SPONGE
















EPDM FIRE RETARDATION SPECIFICATION

EPDM - 30-50mm/min.(spect max 100mm/min. for elastomers.)

Defined as SEB (Self Extinguishing with Burn Rate). Combustion gas off EPDM is carbon dioxide.

All supplied in 50 Metre Coils

All dimensions in millimetres

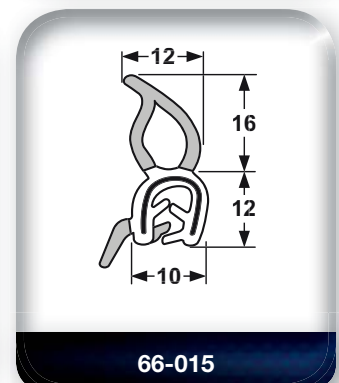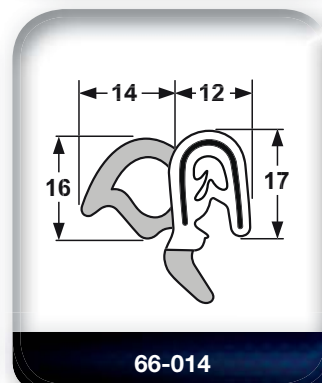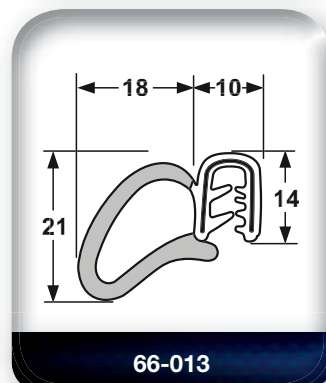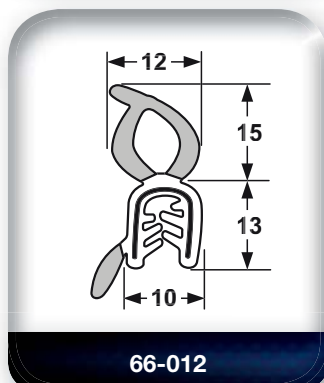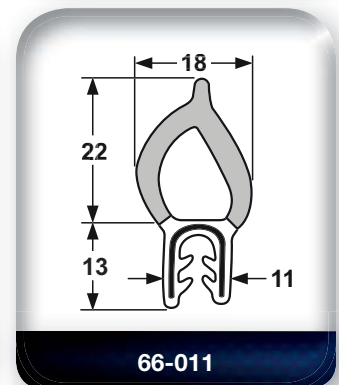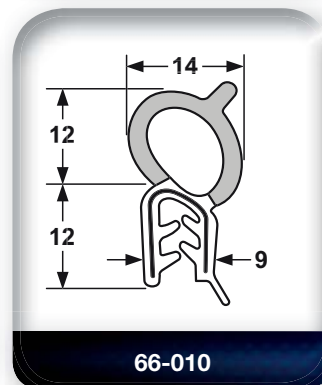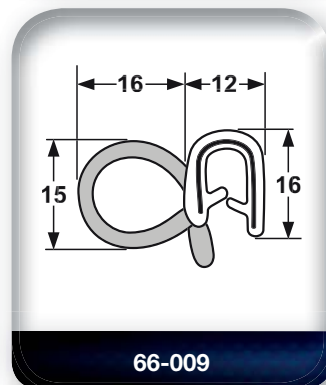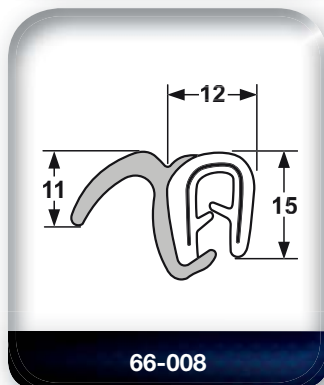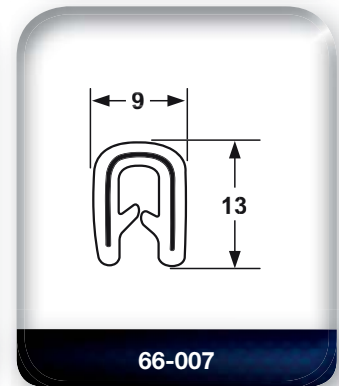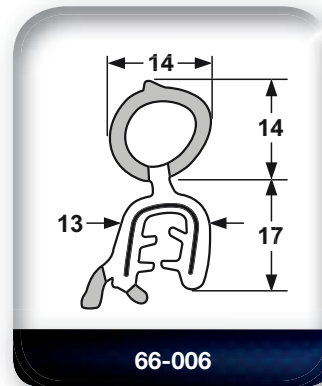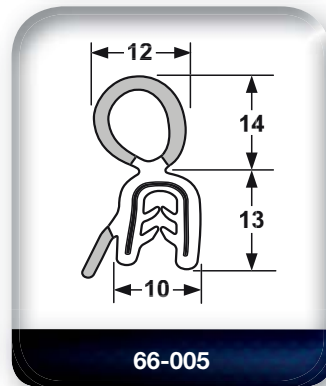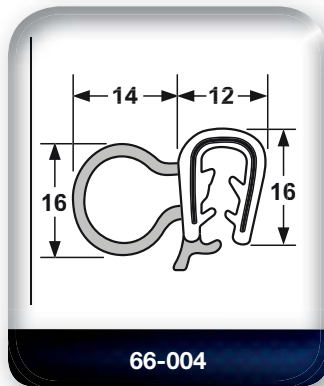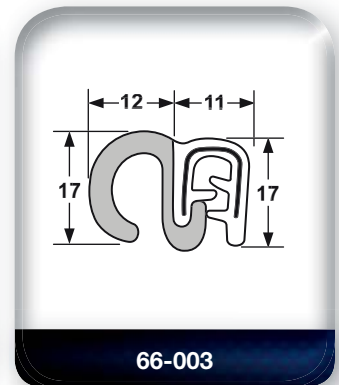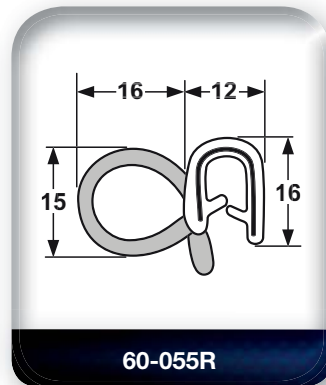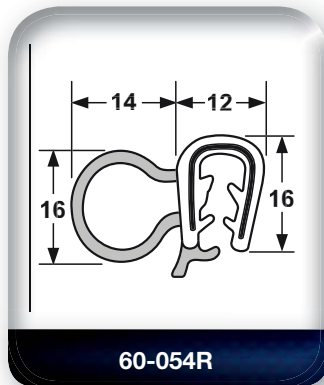

PINCHWELD - EPDM RUBBER & SPONGE


EPDM FIRE RETARDATION SPECIFICATION

EPDM - 30-50mm/min.(spect max 100mm/min. for elastomers.)

Defined as SEB (Self Extinguishing with Burn Rate). Combustion gas off EPDM is carbon dioxide.


All supplied in 50 Metre Coils

All dimensions in millimetres




Equiv. to BS263376


66-016




66-017




66-018




66-020




66-022




66-040




66-052




66-056




66-057




66-060



66-115



66-137



66-157

PINCHWELD - EPDM RUBBER & SPONGE-SCHLEGEL




EPDM FIRE RETARDATION SPECIFICATION

EPDM - 30-50mm/min. (spect max 100mm/min. for elastomers.)

Defined as SEB (Self Extinguishing with Burn Rate). Combustion gas off EPDM is carbon dioxide.

All supplied in 50 Metre Coils

All dimensions in millimetres

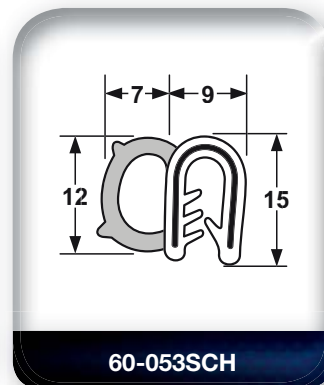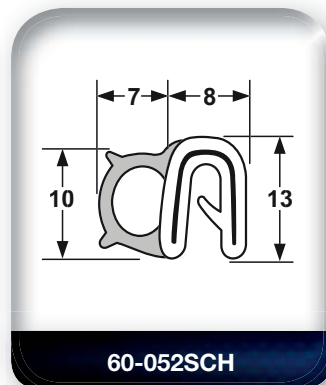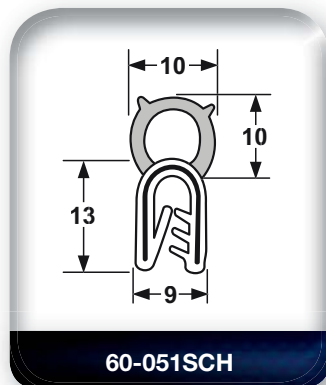

SCHLEGEL type wire cage for maximum flexibility.

PINCHWELD - PVC/EPDM SPONGE

PVC/EPDM SPONGE PINCHWELD FIRE RETARDATION SPECIFICATION


EPDM Sponge - 30-50mm/min.(spect max 100mm/min. for elastomers.)

PVC - 60-100mm/min.(spect max 150mm/min. for PVC & plastics.)

Both are defined as SEB (Self Extinguishing with Burn Rate). PVC is a plastic and all plastics are deformed by heat. Combustion gas off EPDM sponge is carbon dioxide while PVC produces water and some chlorine gasses.


All supplied in 50 Metre coils unless otherwise specified

All dimensions in millimetres




Equiv. to BS283879


60-054 (black)



60-055N (black)




60-056B (black)




Supplied in 100m coils

60-058 (black)




Supplied in 100m coils

60-059 (black)




Supplied in 100m coils


60-063 (black)




**60-801 (charcoal)
60-802 (blue/grey)
#60-800 (camel)**




**60-807
60-806 (Gazelle)**



66-035



66-037



66-083 (black)

#Non Stock Line - Minimum order quantities apply

PINCHWELD - PVC/EPDM SPONGE

PVC/EPDM SPONGE PINCHWELD FIRE RETARDATION SPECIFICATION


EPDM Sponge - 30-50mm/min.(spect max 100mm/min. for elastomers.)

PVC - 60-100mm/min.(spect max 150mm/min. for PVC & plastics.)


Both are defined as SEB (Self Extinguishing with Burn Rate). PVC is a plastic and all plastics are deformed by heat. Combustion gas off EPDM sponge is carbon dioxide while PVC produces water and some chlorine gasses.

All supplied in 50 Metre coils


All dimensions in millimetres



66-084 (black)



**66-173 (black)
66-176 (grey)**



**Equiv. to BS269424,
BS224881, BS287235**

**66-8295 (black)
66-8296 (white)
66-8325 (grey)**

RUBBER EXTRUSION - EPDM SPONGE *Actual size

All supplied in 50m coils, unless otherwise specified

| | | | |
|--|---|--|---|
|  |  |  |  |
| 12-105R | 31-044R | 39-089R | 39-092R |
|  |  |  |  |
| # 39-144R | 39-159R | 39-236R | 39-316R |
|  |  |  |  |
| 39-399R | 39-416R | Equiv. to BS147215 39-478R | 39-480R |
|  |  |  |  |
| 39-497R | 39-499R | Supplied in 30m coils 39-592 | 39-593 |

RUBBER EXTRUSION - EPDM SPONGE ^{*Actual size}

All supplied in 50m coils, unless otherwise specified

| | | | |
|--|--|---|---|
|  <p>Supplied in 30m coils</p> <p>39-594</p> |  <p># 39-607</p> |  <p>39-615</p> |  <p>39-618</p> |
|  <p>39-668</p> |  <p>39-8799</p> |  <p>Supplied in 30m coils</p> <p>39-8840</p> |  <p>Supplied in 30m coils</p> <p>39-8841</p> |
|  <p>60-A01</p> |  <p>60-A02</p> |  <p>60-A12</p> |  <p>60-B01</p> |
|  <p>60-B03</p> |  <p>60-B05</p> |  <p>60-B06</p> |  <p>60-B13</p> |

RUBBER EXTRUSION - EPDM SPONGE *Actual size

All supplied in 50m coils, unless otherwise noted



60-D06



FJ121- (S184)



G124 (S315)



RS1119A (no clips)



RSC97



Supplied in 30m coils

S125



S126





S147




S185


RUBBER EXTRUSION - EPDM SPONGE (RECTANGULAR)
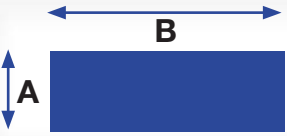
|  | | | | SPONGE SECTION |
|---|------|------|----------|----------------|
| PART No. | A mm | B mm | Length m | |
| P506 (S166) | 1.5 | 25 | 30 | |
| P499 (S161) | 3 | 8 | 30 | |
| P497 (S167) | 3 | 32 | 30 | |
| P495 (S160) | 3 | 38 | 30 | |
| P398 (S156) | 3 | 13 | 30 | |
| P399 (S165) | 3 | 25 | 30 | |
| P507 (S152) | 4.5 | 10 | 30 | |
| P503 (S131) | 4.5 | 17.5 | 30 | |
| P496 (S164) | 4.5 | 25 | 30 | |
| P505 (S526) | 4.5 | 38 | 30 | |
| P485 (S146) | 5 | 13 | 30 | |
| P400 | 6 | 6 | 30 | |
| P401 (S130) | 6 | 13 | 30 | |
| P402 (S163) | 6 | 19 | 30 | |
| P403 (S179) | 6 | 25 | 30 | |
| P431 | 6 | 32 | 30 | |
| P404 | 6 | 38 | 30 | |
| P488 (S183) | 6 | 50 | 30 | |
| P433 | 6 | 70 | 30 | |
| S544 | 6 | 5 | 30 | |
| #39-8842 | 6 | 44 | 30 | |
| 60-8758 | 6 | 10 | 30 | |
| 60-8759 | 6 | 8 | 30 | |
| P504 (S141) | 8 | 10 | 30 | |
| P405 (S186) | 10 | 10 | 30 | |
| P406 (S150) | 10 | 13 | 30 | |
| P501 (S157) | 10 | 17.5 | 30 | |
| P487 (S321) | 10 | 25 | 30 | |
| P407 | 10 | 32 | 30 | |
| P545 | 10 | 38 | 30 | |
| P546 | 10 | 50 | 30 | |
| 60-8757 | 10 | 19 | 30 | |
| P502 (S154) | 11.5 | 11.5 | 30 | |
| P500 (S136) | 12.5 | 22 | 30 | |
| #S551 | 12.5 | 50 | 30 | |



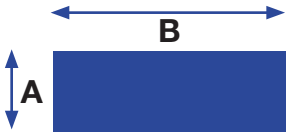
|  | | | | SPONGE SECTION |
|--|------|------|----------|----------------|
| PART No. | A mm | B mm | Length m | |
| P408 (S512) | 13 | 13 | 30 | |
| P409 | 13 | 16 | 30 | |
| P410 | 13 | 19 | 30 | |
| P411 (S135) | 13 | 25 | 30 | |
| P412 (S168) | 13 | 38 | 30 | |
| P413 | 13 | 44 | 30 | |
| P414 | 13 | 50 | 30 | |
| P415 (S162) | 16 | 16 | 30 | |
| P416 | 16 | 19 | 30 | |
| P417 | 16 | 25 | 30 | |
| P422 | 16 | 50 | 30 | |
| P423 (S400) | 19 | 19 | 30 | |
| P427 (S529) | 19 | 25 | 30 | |
| P424 | 19 | 32 | 30 | |
| P425 | 19 | 38 | 30 | |
| P426 | 19 | 50 | 30 | |
| P463 | 22 | 22 | 30 | |
| #P466 | 22 | 38 | 30 | |
| #P472 | 22 | 50 | 30 | |
| P428 | 25 | 25 | 30 | |
| P467 (S169) | 25 | 32 | 30 | |
| P429 (S382) | 25 | 38 | 30 | |
| P473 | 25 | 50 | 30 | |
| #P476 | 32 | 50 | 30 | |
| #P478 | 38 | 38 | 30 | |
| #P479 | 38 | 50 | 30 | |
| S547 | 48 | 6 | 30 | |
| #P484 | 50 | 50 | 30 | |

RUBBER EXTRUSION - EPDM SPONGE (CORD)

|  SPONGE SECTION | | |
|--|-------------|----------|
| PART No. | Diameter mm | Length m |
| P219 | 4 | 30 |
| P216 (S548) | 5 | 30 |
| P489 | 6 | 30 |
| P143 | 7 | 30 |

|  SPONGE SECTION | | |
|---|-------------|----------|
| PART No. | Diameter mm | Length m |
| P138 (S151) | 10 | 30 |
| P142 (S137) | 12.5 | 50 |
| P144 (S546) | 15 | 30 |
| P498 (S158) | 19 | 30 |

RUBBER EXTRUSION - SOLID *Actual size

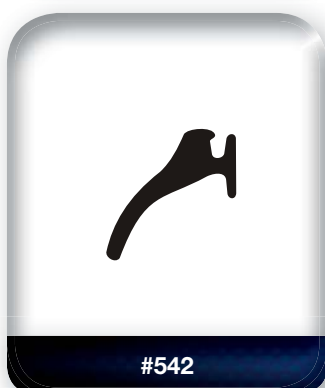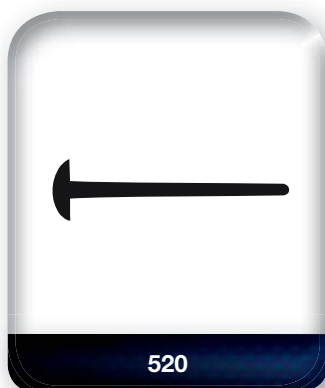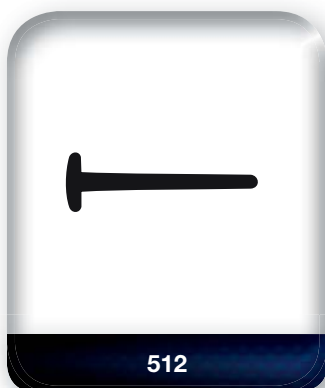


#Non Stock Line - Minimum order quantities apply

RUBBER EXTRUSION - SOLID *Actual size



#Non Stock Line - Minimum order quantities apply





RUBBER EXTRUSION - SOLID *Actual size

| | | | |
|---|--|--|---|
|  |  Supplied in 100m Roll |  |  |
| 39-335R | 39-358R | 39-520R | 39-527R |
|  |  |  |  |
| 39-544R | 39-557R | 39-558R | 39-559R |
|  |  |  |  |
| 39-560R | 39-561R | 39-562R | 39-589 |
|  |  |  |  |
| 39-590 | 39-591 | 51-992 | 39-669 |

#Non Stock Line - Minimum order quantities apply




RUBBER EXTRUSION - SOLID

*Actual size

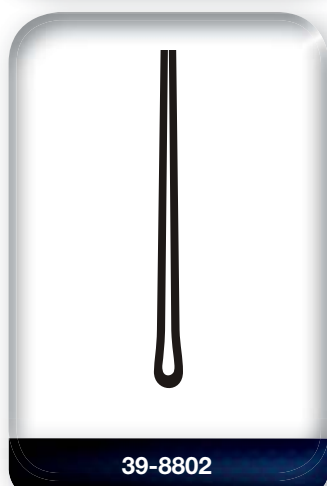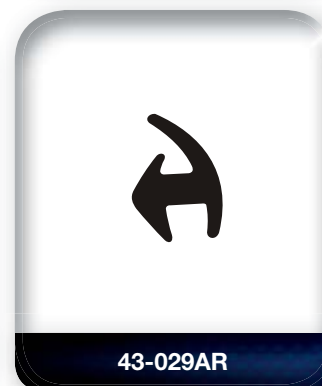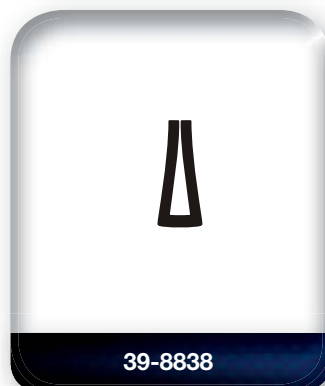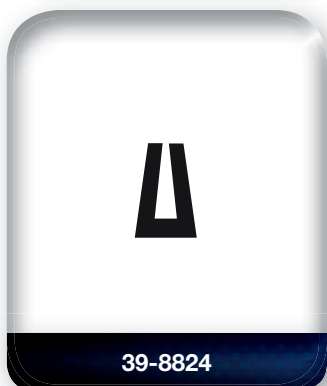

RUBBER EXTRUSION - H SEALS


All dimensions in millimetres

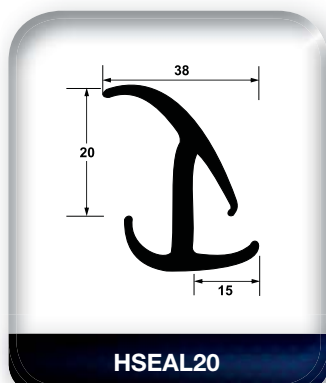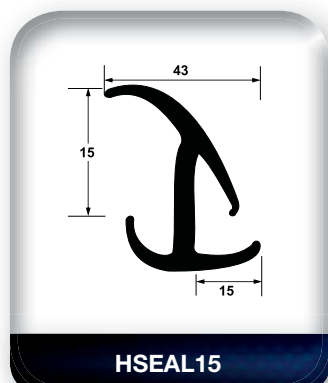

RUBBER EXTRUSION - P & E SEALS


| PRODUCT | DESCRIPTION |
|----------------|--|
| PSEAL10 | EXTRUSION SOLID P SEAL 30 X 1.5 X 10MM |
| PSEAL12 | EXTRUSION SOLID P SEAL 35 X 1.5 X 12MM |
| PSEAL16 | EXTRUSION SOLID P SEAL 30 X 2 X 16.5MM |
| PSEAL18 | EXTRUSION SOLID P SEAL 34 X 3 X 18MM |
| PSEAL20 | EXTRUSION SOLID P SEAL 32 X 2.5 X 20MM |
| PSEAL25 | EXTRUSION SOLID P SEAL 40 X 3 X 25MM |
| PSEAL29 | EXTRUSION SOLID P SEAL 55 X 3 X 29MM |
| ESEAL19 | EXTRUSION SOLID E SEAL 22 X 2 X 19MM |
| ESEAL35 | EXTRUSION SOLID E SEAL 35 X 3.5 X 35MM |

GLAZING CHANNELS & LOCKING STRIPS *Actual size

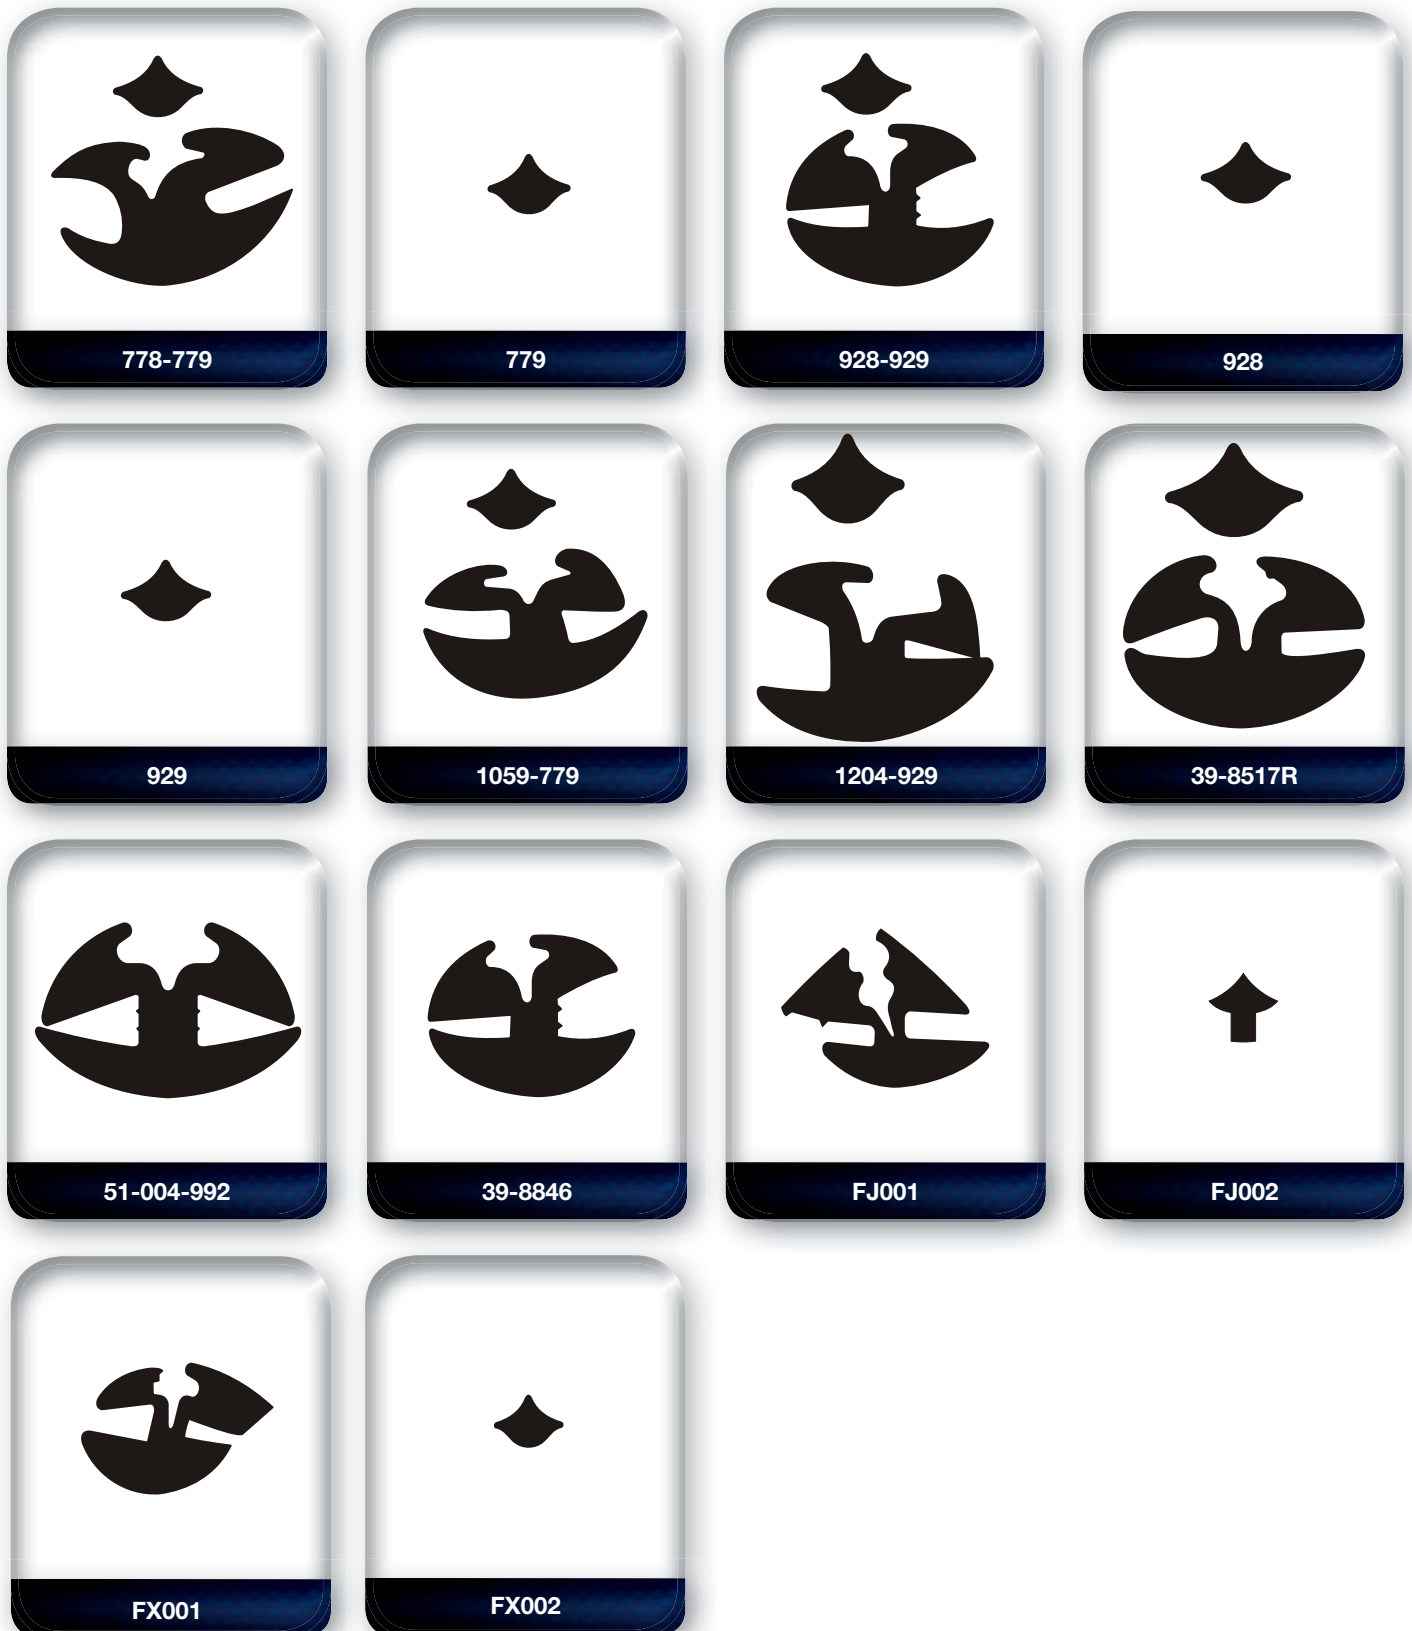

GLASS CHANNEL - METAL INSERTED


All dimensions in millimetres



Rigid steel core encased in rubber with beaded stainless steel edge.

Supplied in 2.44 metre lengths.


YM108X



Rigid steel core encased in rubber with beaded stainless steel edge.

Supplied in 2.44 metre lengths.


YMR13X



Rigid steel core encased in rubber with beaded stainless steel edge.

Supplied in 2.44 metre lengths.


YMR219



Flexible punched steel base encased in rubber with high pile moquette and stainless steel beaded edge.

Supplied in 2.44 metre lengths.


YM54R



Flexible punched steel base encased in rubber with high pile moquette and stainless steel beaded edge.

Supplied in 2.44 metre lengths.

YM3





Rigid core encased in thermoplastic material
Flocked on inner side of lip.

Belt 1.1 metre length.

MA3


GLASS CHANNEL - METAL INSERTED

All dimesions in millimetres

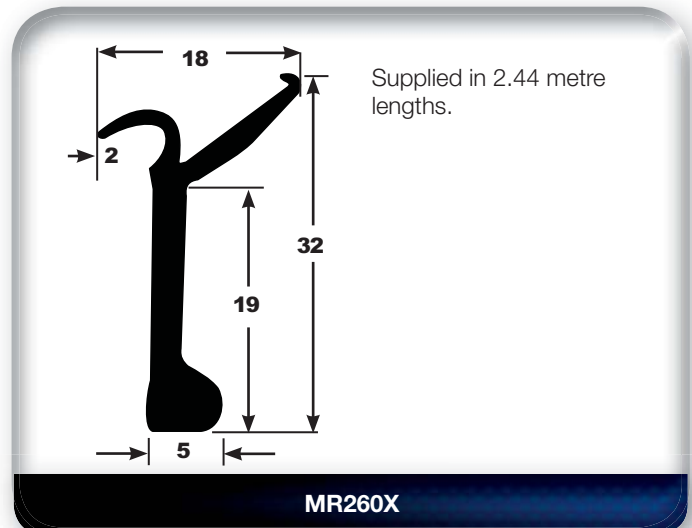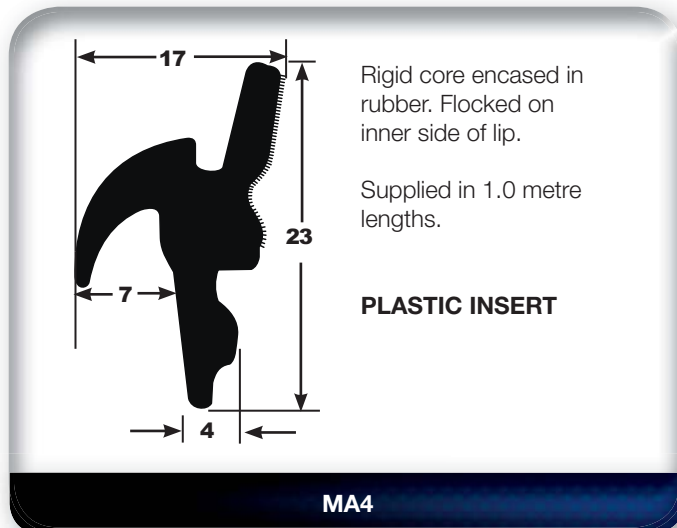

GLASS CHANNEL - METAL INSERTED

All dimensions in millimetres




Flexible steel base.

Rubber encased with felt and moquette lining and stainless steel beaded edges.

Supplied in 2.44 metre lengths

Y620




Flexible steel base.

Rubber encased with felt and moquette lining and stainless steel beaded edges.

Supplied in 2.44 metre lengths

Y630P




Flexible steel base.

Rubber encased with felt and moquette lining and stainless steel beaded edges.

Supplied in 2.44 metre lengths


Y526



Very flexible channel for British and Continental vehicles.

Supplied in 30 metre coils.

Y619P




Flexible steel base.

Rubber encased with felt and moquette lining.

Supplied in 2.5 metre lengths.

Y658X



Rigid steel base.


Rubber encased with felt and moquette lining.

Supplied in 2.5 metre lengths.

C313

GLASS CHANNEL - METAL INSERTED

All dimensions in millimetres



Flexible steel base.
Rubber encased with felt
and moquette lining.

Supplied in 30.00
metre coils.

#C52FLT


GLASS CHANNEL - FLOCKED RUBBER *Actual size

Supplied in 30m rolls





GLASS CHANNEL - FLOCKED RUBBER *Actual size

Supplied in 30m rolls

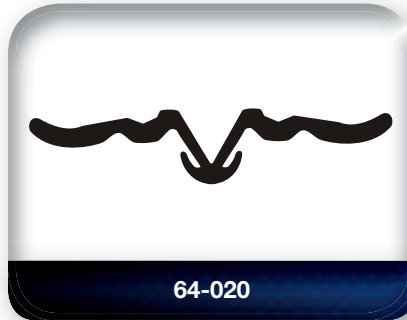






ROLLER DOOR SEALS

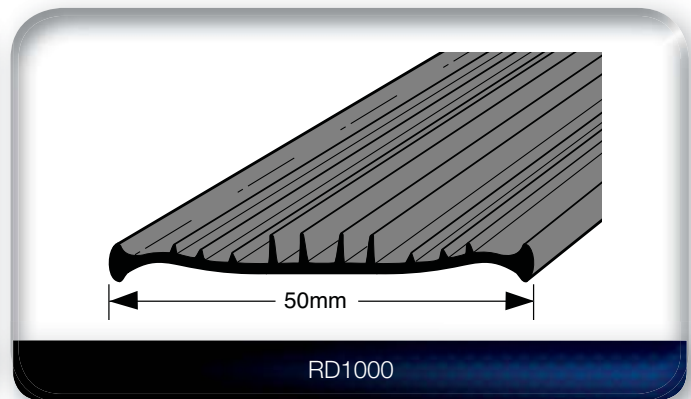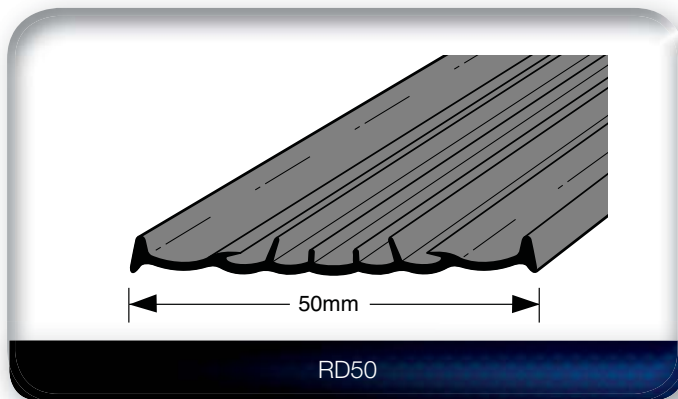

MYLAR WINDSCREEN INSERT STRIP

RSP Australia Mylar Windscreen Seal Insert Strip will replace the rusty old chrome strip insert in the windscreen and rear window rubber seals. These sections represent the most popular sections used in the automotive industry and can be used as replacement insert for most popular vehicles. Where noted these sections are also available in black solid rubber.


All dimensions in millimetres



PVC EXTRUSION - FENDER PIPING

| PART No. | Description |
|-----------|-------------|
| F17365 | Black |
| # F17365W | White |

Supplied in 100 metre rolls.
All dimensions in millimetres

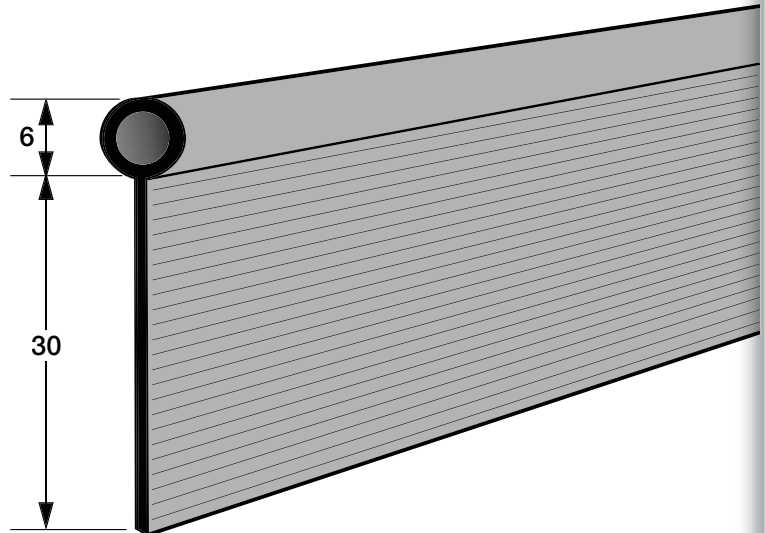


#Non Stock Line - Minimum order quantities apply

PVC EXTRUSION - FENDER FLARE

| PART No. | Description |
|----------|-------------|
| 77-976 | Black |


Supplied in 100 metre rolls.
All dimensions in millimetres

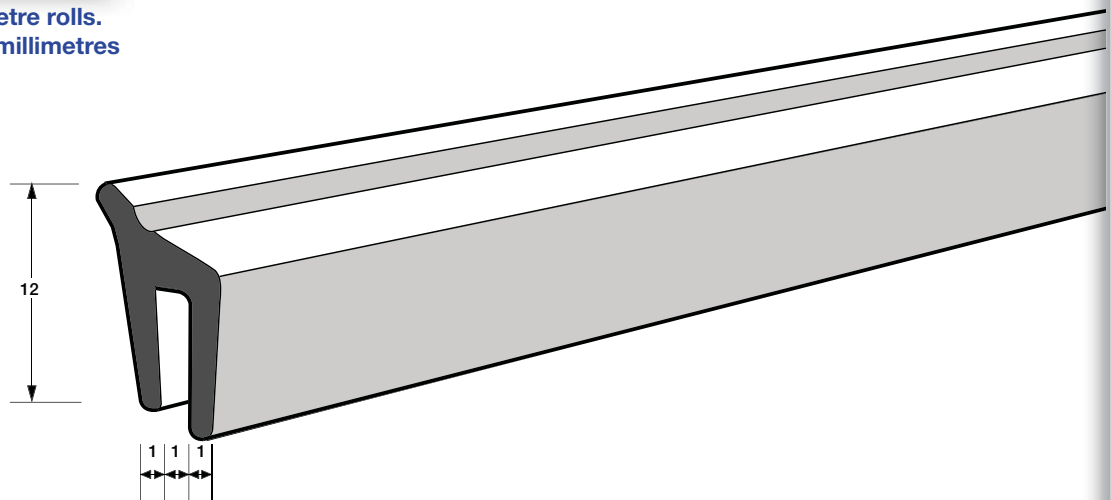

SELF ADHESIVE NEOPRENE SPONGE TAPE

| PART No. | Length m | Width mm | Thickness mm |
|----------|-------------|-------------|-----------------|
| #A-101 | 20 | 9 | 3 |
| #A-102 | 20 | 12 | 3 |
| #A-103 | 20 | 15 | 3 |
| #A-104 | 20 | 19 | 3 |
| #A-105 | 20 | 25 | 3 |
| #A-106 | 20 | 38 | 3 |
| #A-107 | 20 | 50 | 3 |
| #A-111 | 15 | 9 | 4.5 |
| #A-112 | 15 | 12 | 4.5 |
| #A-113 | 15 | 15 | 4.5 |
| #A-114 | 15 | 19 | 4.5 |
| #A-115 | 15 | 25 | 4.5 |
| #A-116 | 15 | 38 | 4.5 |
| #A-117 | 15 | 50 | 4.5 |
| #A-121 | 10 | 9 | 6 |
| #A-122 | 10 | 12 | 6 |
| #A-123 | 10 | 15 | 6 |
| #A-124 | 10 | 19 | 6 |
| #A-125 | 10 | 25 | 6 |
| #A-126 | 10 | 38 | 6 |
| #A-127 | 10 | 50 | 6 |
| #A-131 | 7 | 9 | 9 |
| #A-132 | 7 | 12 | 9 |
| #A-133 | 7 | 15 | 9 |
| #A-134 | 7 | 19 | 9 |
| #A-135 | 7 | 25 | 9 |
| #A-136 | 7 | 38 | 9 |



| PART No. | Length m | Width mm | Thickness mm |
|----------|-------------|-------------|-----------------|
| #A-137 | 7 | 50 | 9 |
| #A-141 | 5 | 9 | 12 |
| #A-142 | 5 | 12 | 12 |
| #A-143 | 5 | 12 | 12 |
| #A-144 | 5 | 19 | 12 |
| #A-145 | 5 | 25 | 12 |
| #A-146 | 5 | 38 | 12 |
| #A-147 | 5 | 50 | 12 |

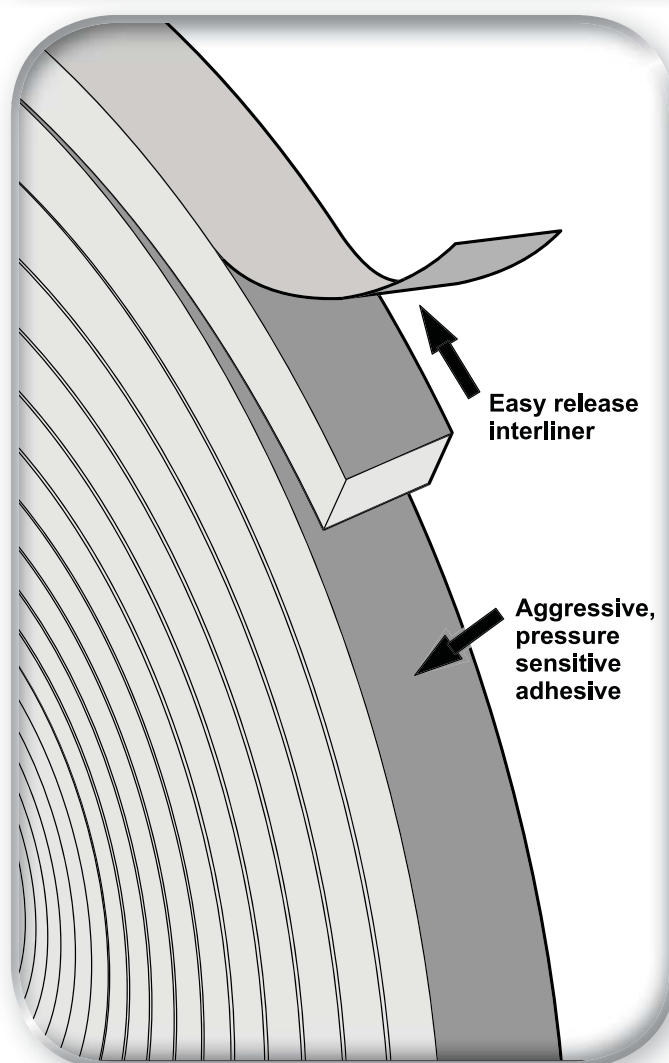

**Highly resilient
closed-cell foam for
high joint movement
and repetitive closure
applications**

TANK STRAPS



Supplied in 50m coils.

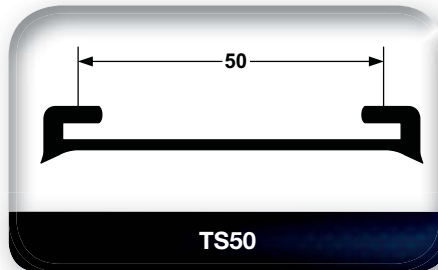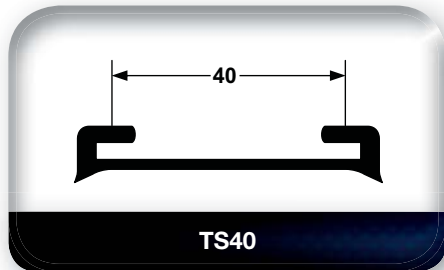

Other sizes available upon request

WHEEL ARCH FLARES

EPDM rubber rolled to suit wheel arch curves, fully ozone and UV stable

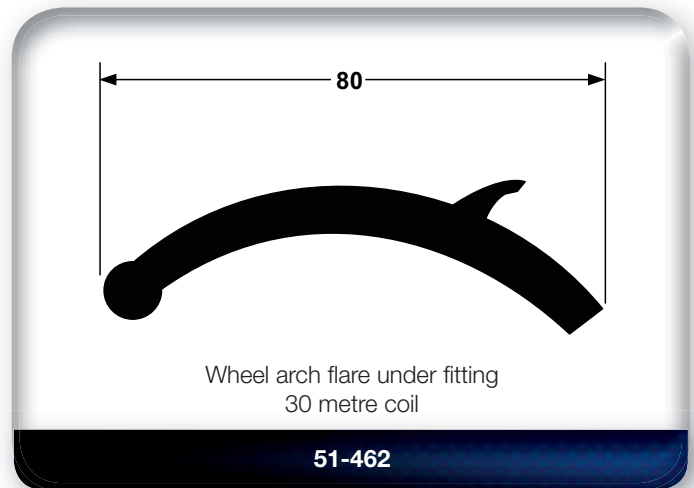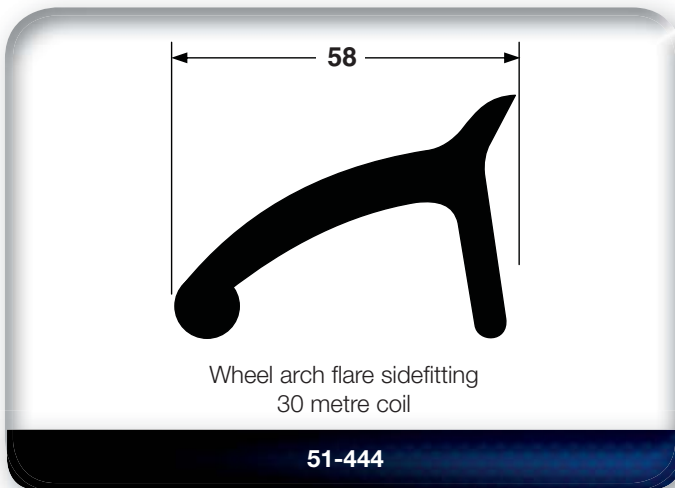

Features:

- Suitable for fitting under wheel arch for protection
- Hard wearing EPDM Rubber
- Durable

Ideal For:

- Bus
- Truck
- 4WD

Automotive Hose



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.





Fuel Hose

38



Fuel Injection Hose
R9 Fuel Injection Hose

39



Fuel Hose - Outer Braided
Heater Hose

40



Transmission Cooler Hose
Vacuum & Washer Tubing

41



Radiator Overflow Hose
LPG / Injection Hose

42



LPG Vapour Hose
Brake Vacuum Hose

43

| | | | |
|--|---|---|----|
|  |  | Power Steering Return Hose 90 Degree Hose Bend | 44 |
|  |  | U Bend Hose Z Shaped Hose | 45 |
| |  | Water & Vacuum Caps | 46 |
|  |  | Straight Hose | 47 |
| |  | Merchandiser - Hose | 48 |
| |  | Merchandiser - Heater Hose | 49 |
| | | Glossary | 49 |
| | | Packaging and Hose Types | 50 |



For over 30 years the Pongpara CODAN name has been synonymous with quality fluid handling systems supplied to the automotive industry. Pongpara CODAN has become an approved supplier to leading car manufactures world wide, such as: BMW, Toyota, Volvo, GM/Opel, Nissan, Honda, Mazda and many more. Today, Pongpara CODAN is one of the largest producers of our range of products in the ASEAN region and continues to grow steadily through a quality policy of continuous improvement and the use of licenced technology from joint partner Codan Gummi A/S of Denmark.

FUEL HOSE

Codan fuel hose is designed to carry automotive fuel and operates at temperatures ranging from -30 degrees C to +100 degrees C.

The inner tube is made from NBR (Nitrile) with an outer cover of CR (Neoprene).

This hose is suitable for Unleaded Petrol (up to 98 Octane) and Diesel, it is not suitable for Ethanol Blends of petrol or Bio Diesel.

The hose is dual spiral wrap reinforced and conforms to SAE 30 R6.

It has a safety factor of 5:1.

This hose is not submersible for in tank use.



#Special order only - Minimum order quantities apply

| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|---------------|------|------|----------------------|------------|------------------|------|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| 3111048/7M | 4.8 | 3/16 | 3 | 10.8 | 3.4 | 0.34 | 15 | 110 | 7 |
| 3111048/30M | 4.8 | 3/16 | 3 | 10.8 | 3.4 | 0.34 | 15 | 110 | 30 |
| 3111063/7M | 6.3 | 1/4 | 3.2 | 12.7 | 3.4 | 0.34 | 20 | 140 | 7 |
| 3111063/30M | 6.3 | 1/4 | 3.2 | 12.7 | 3.4 | 0.34 | 20 | 140 | 30 |
| 3111063/100M | 6.3 | 1/4 | 3.2 | 12.7 | 3.4 | 0.34 | 20 | 140 | 100 |
| 3111079/7M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 7 |
| 3111079/30M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 30 |
| 3111079/100M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 100 |
| 3111095/7M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 7 |
| 3111095/30M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 30 |
| 3111095/100M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 100 |
| #3111110/7M | 11.0 | 7/16 | 3.6 | 18.2 | 2.4 | 0.24 | 45 | 236 | 7 |
| #3111110/30M | 11.0 | 7/16 | 3.6 | 18.2 | 2.4 | 0.24 | 45 | 236 | 30 |
| #3111110/100M | 11.0 | 7/16 | 3.6 | 18.2 | 2.4 | 0.24 | 45 | 236 | 100 |
| 3111127/7M | 12.7 | 1/2 | 3.8 | 20.3 | 2.4 | 0.24 | 50 | 257 | 7 |
| 3111127/30M | 12.7 | 1/2 | 3.8 | 20.3 | 2.4 | 0.24 | 50 | 257 | 30 |

FUEL INJECTION HOSE

Codan EFI Fuel Injection Hose is designed to run at higher pressures and temperatures than normal systems.

The inner tube is made of NBR (Nitrile) with an outer cover of CSM (Hyperlon) and reinforcing made of Kuralon.

This hose is suitable for Petrol with a maximum E10 rating and Diesel with a maximum B5 rating, it is not suitable for Fuel above E10 or B5.

The hose conforms to SAE J30 R7 and GME 08001E Spec.

This hose is not submersible for in tank use.



| PART No. | I.D. | | Wall Thickness | O.D. | Working Pressure | | Bend Radius | Weight | Length |
|-------------|------|------|----------------|------|------------------|------|-------------|--------|--------|
| | mm | inch | mm | mm | Bar | Mpa | mm | gm/m | m |
| 5250075/7M | 7.5 | 5/16 | 3.5 | 14.5 | 3.4 | 0.34 | 25 | 200 | 7 |
| 5250075/30M | 7.5 | 5/16 | 3.5 | 14.5 | 3.4 | 0.34 | 25 | 200 | 30 |
| 5250095/7M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 7 |
| 5250095/30M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 30 |

R9 FUEL INJECTION HOSE

Codan R9 EFI Fuel Injection Hose is designed to run at higher pressures and temperatures than normal Fuel Injection Hoses.

The inner liner is made of FKM (Viton), the inner tube from NBR (Nitrile) with an outer cover of CSM (Hyperlon).

This hose is suitable for Petrol with a maximum E20 rating and Diesel with a maximum B10 rating, it is not suitable for Fuels above E20 or B10.

The hose conforms to SAE J30 R9.

This hose is not submersible for in tank use.



| PART No. | I.D. | | Wall Thickness | O.D. | Working Pressure | | Bend Radius | Weight | Length |
|-------------|------|------|----------------|------|------------------|------|-------------|--------|--------|
| | mm | inch | mm | mm | Bar | Mpa | mm | gm/m | m |
| H533063/7M | 6.3 | 1/4 | 3.05 | 12.4 | 6.9 | 0.69 | 20 | 140 | 7 |
| H533079/7M | 7.9 | 5/16 | 3.05 | 14.0 | 6.9 | 0.69 | 25 | 155 | 7 |
| H533095/7M | 9.5 | 3/8 | 3.15 | 15.8 | 6.9 | 0.69 | 40 | 205 | 7 |
| #H533127/7M | 12.7 | 1/2 | 3.20 | 19.1 | 6.9 | 0.69 | 50 | 250 | 7 |

FUEL HOSE - OUTER BRAIDED

Codan Braided Fuel Hose is designed for use on many European vehicles and motor cycles.

The tube is manufactured from a nitrile based rubber and it is encased in an outer braiding of non-conductive black cotton. It is resistant to oil and petrol. This hose is manufactured to DIN 73379 TYPE B Spec.

#Special order only - Minimum order quantities apply



| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|-------------|------|------|----------------------|------------|------------------|-----|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| #506055/15M | 5.5 | 7/32 | 2.5 | 10.5 | 10 | 1.0 | 20 | 94 | 15 |
| #506075/15M | 7.5 | 9/32 | 2.5 | 12.5 | 9 | 0.9 | 30 | 114 | 15 |
| #506095/15M | 9.5 | 3/8 | 2.5 | 14.5 | 6 | 0.6 | 40 | 135 | 15 |

HEATER HOSE

Codan Heater Hose has been specially developed for vehicle coolant systems and has a safety factor of 3:1. It is suitable for use over a temperature range of -40 degrees C. to +100 degrees C.

The hose is manufactured from a rubber and EPDM blend and is twin braided spiral wrap reinforced, conforming to SAE 20 R3. It is weather resistant and impervious to coolant system additives.

It is not suitable for use with petrochemical products.

#Special order only - Minimum order quantities apply



| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|--------------|------|-------|----------------------|------------|------------------|-----|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| 4801050/30M | 5 | 13/64 | 3.2 | 11.5 | 10 | 1.0 | 29.0 | 110 | 30 |
| 4801080/30M | 8 | 5/16 | 3.0 | 14.0 | 10 | 1.0 | 40 | 200 | 30 |
| 4801095/25M | 9.5 | 3/8 | 3.75 | 17.0 | 10 | 1.0 | 50 | 220 | 25 |
| #4801095/50M | 9.5 | 3/8 | 3.75 | 17.0 | 10 | 1.0 | 50 | 220 | 50 |
| 4801095/100M | 9.5 | 3/8 | 3.75 | 17.0 | 10 | 1.0 | 50 | 220 | 100 |
| 4801127/15M | 12.7 | 1/2 | 3.4 | 19.5 | 10 | 1.0 | 50 | 240 | 15 |
| #4801127/50M | 12.7 | 1/2 | 3.4 | 19.5 | 10 | 1.0 | 50 | 240 | 50 |
| 4801127/100M | 12.7 | 1/2 | 3.4 | 19.5 | 10 | 1.0 | 50 | 240 | 100 |
| 4801160/15M | 16 | 5/8 | 3.4 | 22.8 | 10 | 1.0 | 80 | 290 | 15 |
| 4801160/50M | 16 | 5/8 | 3.4 | 22.8 | 10 | 1.0 | 80 | 290 | 50 |
| 4801160/100M | 16 | 5/8 | 3.4 | 22.8 | 10 | 1.0 | 80 | 290 | 100 |
| 4801191/15M | 19 | 3/4 | 3.6 | 26.3 | 10 | 1.0 | 100 | 360 | 15 |
| 4801191/50M | 19 | 3/4 | 3.6 | 26.3 | 10 | 1.0 | 100 | 360 | 50 |

TRANSMISSION COOLER HOSE

Codan Transmission Cooler Hose is suitable for use with modern automatic transmissions.

It is manufactured with a nitrile inner, reinforced with polyester and covered by a neoprene outer that is resistant to oil, fuel and heat. It can withstand temperatures ranging from -40 degrees C to +135 degrees C.

This hose is manufactured to SAE 30 R6 Spec.

#Special order only - Minimum order quantities apply



| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|---------------|------|------|----------------------|------------|------------------|------|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| 311T079/7M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 7 |
| 311T079/30M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 30 |
| #311T079/100M | 7.9 | 5/16 | 3.4 | 14.7 | 3.4 | 0.34 | 25 | 160 | 100 |
| 311T095/7M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 7 |
| 311T095/30M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 30 |
| #311T095/100M | 9.5 | 3/8 | 3.6 | 16.7 | 3.4 | 0.34 | 40 | 210 | 100 |

VACUUM & WASHER TUBING

Codan Vacuum and Washer Tubing is designed for use in windscreen washer systems and vacuum operated controls. It is manufactured from EPDM rubber and will withstand the pressure exerted by windscreen washer systems and control system vacuum. It is heat and weather resistant.

This hose is manufactured to SAE-J-200 Spec.



| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Length m |
|-------------|------|-------|----------------------|------------|-------------|
| | mm | inch | | | |
| 3300025/15M | 2.5 | 7/64 | 2 | 6.5 | 15 |
| 3300030/15M | 3 | 1/8 | 2 | 7 | 15 |
| 3300040/15M | 4 | 5/32 | 2 | 8 | 15 |
| 3300045/15M | 4.5 | 11/64 | 2 | 8.5 | 15 |
| 3300055/15M | 5.5 | 7/32 | 2 | 10 | 15 |
| 3300063/15M | 6.3 | 1/4 | 2 | 10.5 | 15 |

RADIATOR OVERFLOW HOSE

Codan Radiator Overflow Tubing is suitable for radiator overflow and header tank applications.

It is manufactured from EPDM rubber and will withstand radiator temperatures and pressures as well as vacuum. It is weather and radiator additive resistant.

#Special order only - Minimum order quantities apply



| PART No. | I.D. | | Wall Thickness | O.D. | Length |
|-------------|------|------|----------------|------|--------|
| | mm | inch | mm | mm | m |
| 3300079/15M | 8 | 5/16 | 2 | 12 | 15 |
| 3300095/15M | 10 | 3/8 | 2 | 14 | 15 |

LPG / INJECTION HOSE

Codan Automotive Gas Hose is designed specifically to meet AS/NZS 1869 class D standard for use in LPG and CNG fuel conversions. The class D rating is the highest classification and this hose can replace any other hoses of ECE67 Class 2 and DIN4815 teil4

Printing on Hose:

XXX (Codan Logo) CODAN LPG HOSE AS/NZS1869
CLASS D ID XX (LOT NO. XXX)

#Special order only - Minimum order quantities apply



| PART No. | I.D. | | Wall Thickness | O.D. | Working Pressure | | Bend Radius | Weight | Length |
|---------------|------|-------|----------------|------|------------------|-----|-------------|--------|--------|
| | mm | inch | mm | mm | Bar | Mpa | mm | gm/m | m |
| #H251T040/25M | 4 | 7/32 | 2.6 | 26 | 26.0 | 2.6 | 110 | 35 | 25 |
| #H251T060/25M | 6 | 1/4 | 2.6 | 26 | 26.0 | 2.6 | 140 | 50 | 25 |
| #H251T100/25M | 10 | 3/8 | 2.6 | 26 | 26.0 | 2.6 | 210 | 80 | 25 |
| #H251T120/25M | 12 | 15/32 | 3.5 | 19 | 26.0 | 2.6 | 48 | 235 | 25 |

LPG VAPOUR HOSE

Codan Vapour Hose is specifically designed to carry vapours from automotive LPG conversions.

The hose is manufactured from neoprene based tube and is encased in a braided cotton outer reinforcement. It is oil and petrol resistant.



#Special order only - Minimum order quantities apply

| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|--------------|------|-------|----------------------|------------|------------------|-----|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| #2601120/20M | 12 | 1/2 | 3.2 | 18.4 | 20 | 2.0 | 60 | 20 | 20 |
| 2601170/20M | 17 | 21/32 | 3.5 | 23.4 | 20 | 2.0 | 80 | 20 | 20 |
| 2601190/20M | 19 | 3/4 | 3.5 | 26 | 20 | 2.0 | 90 | 20 | 20 |
| 2601250/20M | 25 | 1 | 4.5 | 34 | 20 | 2.0 | 100 | 20 | 20 |

BRAKE VACUUM HOSE

Codan Brake Vacuum Hose is designed to transmit manifold vacuum in automotive power assisted braking systems. It is manufactured from neoprene and reinforced with rayon.

Manufactured to SAE J 1403 it is resistant to oil, petrol, heat and weather.



#Special order only - Minimum order quantities apply

| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Vacuum tested to | Bend Radius mm | Weight gm/m | Length m |
|--------------|------|-------|----------------------|------------|------------------|-------------------|----------------|-------------|
| | mm | inch | | | | | | |
| 4205095/7M | 9.5 | 11/32 | 4 | 17.5 | 87% | 30 | 252 | 7 |
| 4205095/30M | 9.5 | 11/32 | 4 | 17.5 | 87% | 30 | 252 | 30 |
| 4205120/7M | 12.5 | 1/2 | 4 | 20 | 87% | 30 | 299 | 7 |
| #4205120/30M | 12.5 | 1/2 | 4 | 20 | 87% | 30 | 299 | 30 |

POWER STEERING RETURN HOSE

Codan Power Steering Return Hose is designed specifically as low pressure side return hose for vehicle power steering systems.

It is manufactured with a nitrile inner, reinforced with polyester and covered by a neoprene outer that is resistant to oil, fuel and heat.

Operating temperature range is -40 degrees C to +121 degrees C with a safety factor of 4:1. This hose is manufactured to SAE J 189 Spec.

#Special order only - Minimum order quantities apply




| PART No. | I.D. | | Wall Thickness mm | O.D. mm | Working Pressure | | Bend Radius mm | Weight gm/m | Length m |
|--------------|------|------|----------------------|------------|------------------|------|-------------------|----------------|-------------|
| | mm | inch | | | Bar | Mpa | | | |
| 5130079/7M | 7.9 | 5/16 | 4 | 16 | 17.2 | 1.72 | 25 | 224 | 7 |
| #5130079/30M | 7.9 | 5/16 | 4 | 16 | 17.2 | 1.72 | 25 | 224 | 30 |
| 5130100/7M | 10 | 3/8 | 4 | 16 | 17.2 | 1.72 | 40 | 242 | 7 |
| #5130100/30M | 10 | 3/8 | 4 | 16 | 17.2 | 1.72 | 40 | 242 | 30 |

90 DEGREE HOSE BEND

These 90 degree Universal Hose Bends are available in the most popular sizes.

Manufactured to Codan's high standards these hose bends are suitable for an array of automotive and industrial uses.


| PART No. | I.D. mm | A mm |
|----------|------------|---------|
| PCHNB9 | 9.45 | 290 |
| PCHNB13 | 12.7 | 290 |
| PCHNB16 | 15.9 | 290 |
| PCHNB19 | 19.05 | 290 |
| PCHNB22 | 22.25 | 290 |
| PCHNB25 | 25.4 | 290 |
| PCHNB35 | 34.95 | 290 |
| PCHNB37 | 37.8 | 290 |
| PCHNB38 | 38.1 | 290 |

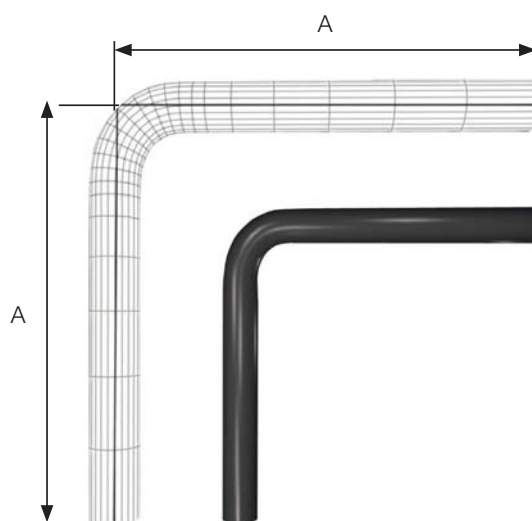

U BEND HOSE

These U Bend hoses are manufactured to Codan's high standards and are suitable for an array of automotive and industrial uses. They are intended for use with petroleum products only.

| PART No. | I.D. mm | A mm |
|----------|------------|---------|
| PCHUB8 | 8 | 280 |
| PCHUB10 | 10 | 280 |

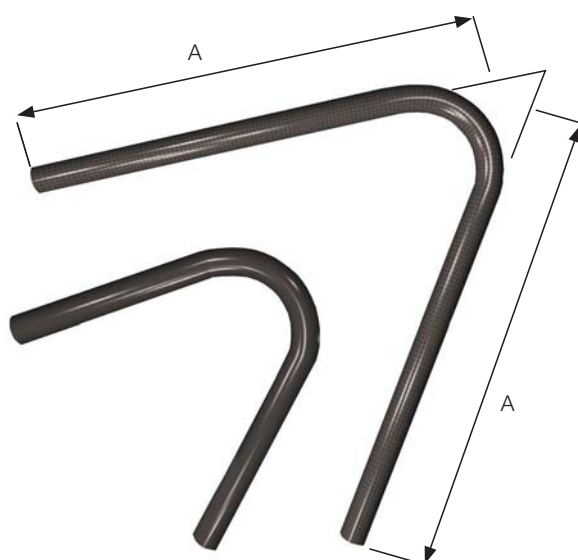

Z SHAPED HOSE

Codan's range of Z shaped hose is one of the most extensive available. These hoses can be configured into the various forms emanated by today's complicated and cramped engine bays. They can also be used in many industrial applications. These hoses should only be used with liquids specified.

| PART No. | Type | I.D. mm |
|----------|-----------------------------|------------|
| HHZ6 | Water | 6 |
| HHZ8 | Water | 8 |
| HHZ10 | Water | 10 |
| HHZ12 | Water | 12 |
| HHZ16 | Water | 16 |
| HFEZ6 | Fuel Vapour / Vacuum / Vent | 6 |
| HFEZ8 | Fuel Vapour / Vacuum / Vent | 8 |
| HFEZ10 | Fuel Vapour / Vacuum / Vent | 10 |
| HFEZ12 | Fuel Vapour / Vacuum / Vent | 12 |
| HFZ6 | Fuel (not EFI) | 6 |
| HFZ8 | Fuel (not EFI) | 8 |
| HFZ10 | Fuel (not EFI) | 10 |
| HFZ12 | Fuel (not EFI) | 12 |



WATER & VACUUM CAPS

| PART No. | Description | UOM |
|----------------|---------------------------|-----------|
| RBP-18 | Vacuum Cap 1/8" I.D. | Each |
| RBP-316 | Vacuum Cap 3/16" I.D. | Each |
| RBP-14 | Vacuum Cap 1/4" I.D. | Each |
| RBP-516 | Vacuum Cap 5/16" I.D. | Each |
| RBP-12 | Water Cap 1/2" I.D. | Each |
| RBP-38 | Water Cap 3/8" I.D. | Each |
| RBP-58 | Water Cap 5/8" I.D. | Each |
| RBP-34 | Water Cap 3/4" I.D. | Each |
| VC18 | Vacuum Cap Kit 1/8" I.D. | Pack of 4 |
| VC316 | Vacuum Cap Kit 3/16" I.D. | Pack of 4 |
| VC14 | Vacuum Cap Kit 1/4" I.D. | Pack of 4 |
| VC516 | Vacuum Cap Kit 5/16" I.D. | Pack of 4 |

| PART No. | Description | UOM |
|--------------|-------------------------|-------------------------|
| WC12 | Water Cap Kit 1/2" I.D. | Pack of 2 with 2 clamps |
| WC12A | Water Cap Kit 1/2" I.D. | Pack of 1 with 1 Clamp |
| WC12B | Water Cap Kit 1/2" I.D. | Pack of 2 |
| WC34 | Water Cap Kit 3/8" I.D. | Pack of 2 with 2 clamps |
| WC34A | Water Cap Kit 3/4" I.D. | Pack of 1 with 1 Clamp |
| WC34B | Water Cap Kit 3/4" I.D. | Pack of 2 |
| WC58 | Water Cap Kit 5/8" I.D. | Pack of 2 with 2 clamps |
| WC58A | Water Cap Kit 5/8" I.D. | Pack of 1 with 1 Clamp |
| WC58B | Water Cap Kit 5/8" I.D. | Pack of 2 |
| WC38 | Water Cap Kit 3/8" I.D. | Pack of 2 with 2 clamps |
| WC38B | Water Cap Kit 3/8" I.D. | Pack of 2 |



STRAIGHT HOSE

Codan Straight Hose is manufactured from high quality rubber and has many automotive and industrial applications.

COOLANT



NOT suitable for petroleum based products.

| PART No. | I.D. mm | Length m |
|----------|------------|-------------|
| SRH16 | 16 | 1 |
| SRH22 | 22 | 1 |
| SRH25 | 25 | 1 |
| SRH28 | 28 | 1 |
| SRH32 | 32 | 1 |
| SRH35 | 35 | 1 |
| SRH38 | 38 | 1 |
| SRH42 | 42 | 1 |
| SRH45 | 45 | 1 |
| SRH50 | 50 | 1 |
| SRH54 | 54 | 1 |
| SRH57 | 57 | 1 |
| SRH60 | 60 | 1 |
| SRH63 | 63 | 1 |
| SRH70 | 70 | 1 |
| SRH76 | 76 | 1 |
| SRH83 | 83 | 1 |
| SRH89 | 89 | 1 |

FUEL



Suitable for petroleum based products.

| PART No. | I.D. mm | Length m |
|----------|------------|-------------|
| SOH16 | 16 | 1 |
| SOH22 | 22 | 1 |
| SOH25 | 25 | 1 |
| SOH28 | 28 | 1 |
| SOH32 | 32 | 1 |
| SOH35 | 35 | 1 |
| SOH38 | 38 | 1 |
| SOH42 | 42 | 1 |
| SOH45 | 45 | 1 |
| SOH50 | 50 | 1 |
| SOH54 | 54 | 1 |
| SOH57 | 57 | 1 |
| SOH60 | 60 | 1 |
| SOH63 | 63 | 1 |
| SOH70 | 70 | 1 |
| SOH76 | 76 | 1 |
| SOH83 | 83 | 1 |
| SOH89 | 89 | 1 |

Ideal for:

- Truck
- 4x4
- Tractor
- Car
- Boat
- Bus

MERCHANDISER - HOSE

This Merchandiser is designed to increase your sales of hose product. It is a robustly made powder coated steel cabinet. It is designed to hold 12 spools of hose and can be either displayed as a free standing unit or mounted to the wall. Among its many features are metric and imperial measuring scales, front loading of stock and bold marking of hose type and sizing.

* INCLUDED MERCHANDISER

FEATURES

- Fully Powder Coated Steel Cabinet
- Holds 12 Spools of Product
- Can Contain up to 8 Different Types of Hose
- Wall Mountable or Free Standing



PART NO. PCH001-G

| Qty | Pack | Part No. | Description | I.D. | | Length m |
|-----|-------|-------------|---------------------|------|-------|-------------|
| | | | | mm | inch | |
| 1 | Spool | 4205095/7M | Brake Vacuum | 9.5 | 11/32 | 7 |
| 1 | Spool | 311T079/7M | Transmission Cooler | 7.9 | 5/16 | 7 |
| 1 | Spool | 3111048/7M | Fuel | 4.8 | 3/16 | 7 |
| 1 | Spool | 3111063/7M | Fuel | 6.3 | 1/4 | 7 |
| 1 | Spool | 3111079/7M | Fuel | 7.9 | 5/16 | 7 |
| 1 | Spool | 3111095/7M | Fuel | 9.5 | 3/8 | 7 |
| 1 | Spool | 3300025/15M | Vacuum & Washer | 2.5 | 7/64 | 15 |
| 1 | Spool | 3300030/15M | Vacuum & Washer | 3 | 1/8 | 15 |
| 1 | Spool | 3300040/15M | Vacuum & Washer | 4 | 5/32 | 15 |
| 1 | Spool | 3300055/15M | Vacuum & Washer | 5.5 | 7/32 | 15 |
| 1 | Spool | 3300063/15M | Vacuum & Washer | 6.3 | 1/4 | 15 |
| 1 | Spool | 5250075/7M | EFI Fuel Hose | 7.9 | 5/16 | 7 |

* See pages 38, 39, 40, 41 & 43 for full hose specifications.

MERCHANDISER - HEATER HOSE

This Merchandiser is dedicated to automotive heater hose and is a strongly built, powder coated, free standing cabinet. It comes with stock of the 3 most popular heater hose sizes and features easy front loading, metric and imperial measuring scales and bold easy to read size markings.

* Also available optional 3/8 heater hose.

* INCLUDED MERCHANDISER

FEATURES

- Metric & Imperial Measuring Scale
- Holds 3 Boxes
- Bold Marking of Hose Type & Size

PART NO. PCH002-G

| Qty | Pack | Part No. | I.D. | | Length m |
|-----|------|-------------|------|------|-------------|
| | | | mm | inch | |
| 2 | Box | 4801127/15M | 12.7 | 1/2 | 15 |
| 2 | Box | 4801160/15M | 16 | 5/8 | 15 |
| 2 | Box | 4801191/15M | 19 | 3/4 | 15 |

* See page 40 for full hose specifications.



GLOSSARY

| | |
|------|-------------------------|
| I.D. | Inside Diameter |
| O.D. | Outside Diameter |
| Bar | Measurement of Pressure |
| MPa | Megapascals |
| gm/m | Grams per Metre |
| mm | Millimetre |
| m | Metre |

PACKAGING TYPES



MERCHANDISER SPOOLS



BULK SPOOLS



ROLLED HOSES



MERCHANDISER BOXES

HOSE TYPES



| Description | Merchandiser Boxes | Merchandiser Spools | Bulk Spools | Rolled Hose |
|---------------------------|--------------------|---------------------|-------------|-------------|
| Fuel Hose | X | X | X | |
| Fuel Injection Hose | X | X | | |
| Transmission Cooler Hose | X | X | X | |
| Power Steering Hose | X | X | | |
| Heater Hose | X | | X | X |
| Vacuum and Washer Tubing | | X | | |
| Radiator Overflow Tubing | | X | | |
| Radiator Overflow Hose | X | X | | |
| LPG Injection Hose | X | | | |
| LPG Vapour Hose | | | | X |
| Brake Vacuum Hose | X | X | | |
| PVC Tubing Fuel Resistant | | | | |

ALSO AVAILABLE:

90 Degree Hose Bend, U Bend Hose, Straight Hose, Z Shaped Hose & Water Caps

* SEE CATALOGUE FOR FURTHER DETAILS, SIZING & SPECIFICATIONS

Moulded Rubber Products



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.



Wheel Chocks **53**

Rubber Hoist Pads **54**

Crane Pads **55**

Rubber Speed Humps **56**

Heavy Duty Buffers **58**

Moulded Docking Rubber **59**

Bumper Mounting **59**

Rubber Corner Guards **60**

Rubber Pillar Guards **60**

Rubber Tie Down Straps **61**

Blanking Grommets **62**

Cushion Connector **62**

Rubber Bushes **63**


Anti-Rattle Bumpers & Grommets **65**

WHEEL CHOCKS

The range of wheel chock products shown in this catalogue have been independently tested to the load factors shown in the SAE J348 (Society Of Automotive Engineers) international standard. All wheel chocks were found to meet and in some cases exceeded the required load ratings in the Standard.

SMALL:


Length 205mm
Width 130mm
Height 100mm
Weight 1kg



WC1467A

MEDIUM:

Length 205mm
Width 205mm
Height 105mm
Weight 2kg



WC1468A

LARGE HALF MOON:

Length 260mm
Width 180mm
Height 210mm
Weight 4.5kg



Also available in yellow

WC2556A

JUMBO HALF MOON:

Length 300mm
Width 300mm
Height 260mm
Weight 12kg



WC3783

PYRAMID:

Length 250mm
Width 200mm
Height 160mm
Weight 4kg



WC1086

JUMBO PYRAMID:

Length 380mm
Width 215mm
Height 155mm
Weight 9.5kg



WC1087

WHEEL CHOCK WITH HANDLE:

Length 255mm
Width 125mm
Height 150mm
Weight 2.5kg



WC1088

WHEEL CHOCK WITH HANDLE:

Length 250mm
Width 90mm
Height 150mm
Weight 2.5kg



WC1089

TETHERED WHEEL CHOCK:

Length 205mm
Width 105mm
Height 90mm
Weight 3kg



Rope length 900mm

WC24483

IDEAL FOR:

- Truck
- Bus
- Aviation
- Variety of Industries

FEATURES:

- Manufactured from an extremely durable and hardwearing EPDM blended rubber compound.

RUBBER HOIST PADS



RUBBER HOIST PAD TO SUIT
BISHAMON RKN40NW,
NSA30, NSP30 HOISTS
NO SCREWS INCLUDED

RHPB001



RUBBER HOIST PAD TO SUIT
TECALEMIT V15100 & 3000
SERIES HOISTS

RHPT002



RUBBER HOIST PAD TO
SUIT 2 & 3 HOLE POWERREX
2900F 2900FR HOISTS
SCREWS NOT INCLUDED

RHPP003



RUBBER HOIST PAD TO SUIT
BISHAMON SPW3000,
SPW2500 HOISTS
NO SCREWS INCLUDED

RHPB004



RUBBER HOIST PAD TO SUIT
MOLNAR MF17505-85A-3T,
95A-3T & 4T HOISTS

RHPM005

- Molnar
- Tecalemit
- Bishamon
- Powerrex

**VEHICLE HOIST REPLACEMENT PADS MADE
FROM HIGH GRADE DURABLE RUBBER**

CRANE PADS

| Compressed Distance | Compressive Load |
|---------------------|------------------|
| 5mm | 22,920 kgf |
| 10mm | 74,392 kgf |
| 15mm | 127,842 kgf |
| 20mm | 182,225 kgf |
| 21.5mm | 217,522 kgf |



| Part No. | Height | Width | Thickness |
|----------|--------|-------|-----------|
| #92139 | 355mm | 355mm | 50mm |
| #92140 | 460mm | 460mm | 50mm |


#Special order only - Minimum order quantities apply

FEATURES:

- Excellent support for crane and excavator feet, or other equipment.
- Being made from superior rubber compound, the Rubber Crane Pad leaves no mark on surface and damage to landscape is reduced.
- Provides a safer and stable footing especially in wet ground conditions.
- Rubber materials provide heavy-duty uses while being resilient and rust free.
- Surface has anti-slip design to enhance safety grip.
- Rubber Crane Pad has handle on one-side to enhance ease of use when shifting locations.

RUBBER SPEED HUMPS

These natural rubber speed humps meet Australian Standards (AS2890.1-1993) for off street speed control mechanisms for; colour, height, shape and ramp angle when laid in an alternating pattern.

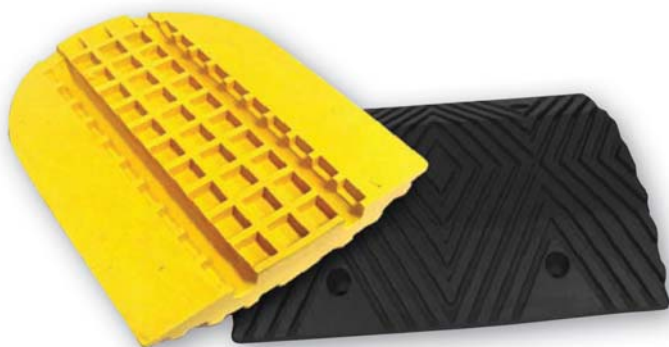

#Special order only - Minimum order quantities apply



| PART No. | Description | Material | Length | Width | Height | Weight | Colour |
|-------------|-------------|----------------------|--------|-------|--------|--------|--------|
| #HUMP-END-B | End | Solid Natural Rubber | 500mm | 400mm | 60mm | 10.5kg | |
| #HUMP-B | Hump | Solid Natural Rubber | 500mm | 400mm | 60mm | 10.5kg | |
| #HUMP-END-Y | End | Solid Natural Rubber | 500mm | 400mm | 60mm | 10.5kg | |
| #HUMP-Y | Hump | Solid Natural Rubber | 500mm | 400mm | 60mm | 10.5kg | |

FEATURES:

- Designed to comply with AS2890.1-1993
- Full load bearing contact area with road surface
- Convenient 500mm modules; black or yellow.
- Each module comes complete with 4 fixings
- Truly independent modules for easy removal
- Concealed fixings remain accessible
- Built-in bridge to accommodate cables or hoses - up to 25mm diameter.
- Rubber construction conforms to uneven surfaces
- Solid colour won't chip or wear
- Non-slip surface moulded into each module
- Highly shock absorbent rubber; softer and quieter than concrete or metal humps.

IDEAL FOR:

- Car Parks
- Private access roads
- Schools
- Shopping Centres
- Factory Complexes

RUBBER SPEED HUMPS

These natural rubber speed humps are suitable for off street speed control mechanisms; colour, height, shape and ramp angle when laid in an alternating pattern. Diamond Plugs included.



#Special order only - Minimum order quantities apply

| PART No. | Description | Material | Length | Width | Height | Colour |
|----------|-------------|----------------------|--------|-------|--------|--------|
| #92608 | Hump | Solid Natural Rubber | 1000mm | 300mm | 50mm | Black |
| #92609 | Hump | Solid Natural Rubber | 1000mm | 300mm | 50mm | Yellow |
| #92610 | End | Solid Natural Rubber | 150mm | 300mm | 50mm | Black |
| #92611 | End | Solid Natural Rubber | 150mm | 300mm | 50mm | Yellow |

FEATURES:




- Low profile design
- Longer for better coverage
- Easy installation, diamonds cover the screws.
- Highly shock absorbent rubber is both softer and quieter than concrete or metal humps.
- Non-slip surface moulded into each module.
- Reduce the possibility of accidents by reducing traffic speed.
- Bright solid colour won't chip and is more easily seen from a distance and in dark conditions.
- Rubber construction conforms to uneven surfaces.
- Independent modules for easy installation and removal.
- Built in bridge to accommodate cables or hoses up to 25mm diameter.

IDEAL FOR:

- Car Parks
- Private access roads
- Schools
- Shopping Centres
- Factory Complexes

HEAVY DUTY BUFFERS

All dimensions in millimetres

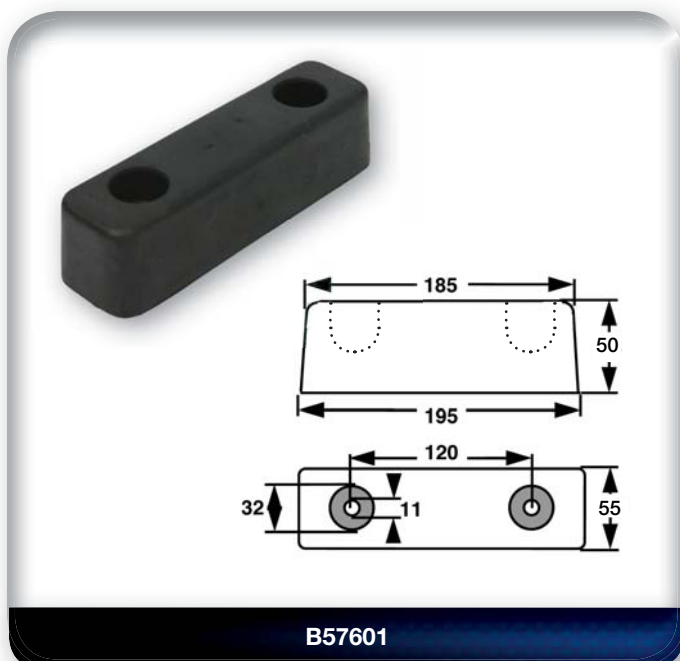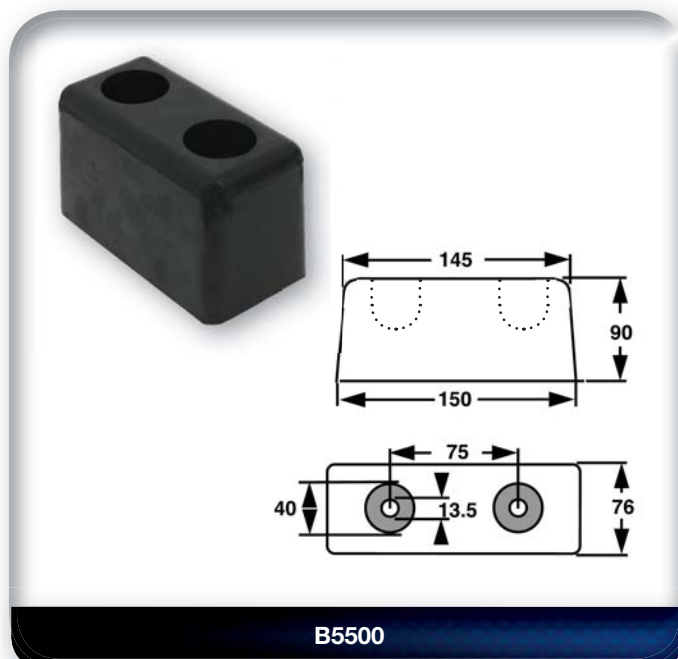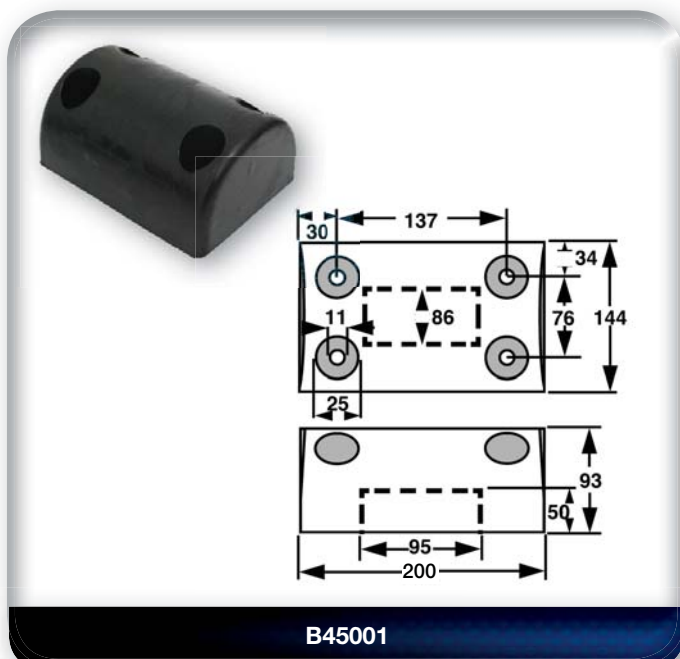

FEATURES:

- Moulded in mounting holes for easy fixing
- Manufactured from an extremely durable and hardwearing EPDM blended rubber compound

* All dimensions are in millimetres. Hardness = 75 DURO

IDEAL FOR:

- Medium Weight truck bumpers.
- Steel Fire Doors
- Any industrial application where noncyclic buffing is experienced.

MOULDED DOCKING RUBBER

| PART No. | Height | Width | Length | Wall Thickness |
|---------------|--------|-------|--------|----------------|
| DR1000 | 110mm | 90mm | 1000mm | 20mm |
| DR300 | 110mm | 90mm | 300mm | 20mm |

Protect property and vehicles from damage by using these heavy duty docking buffer. Suitable for loading bays and jetties etc. They are manufactured from an extremely durable and hardwearing EPDM blended rubber compound.

FEATURES:

- Can be easily drilled for mounting onsite or cut to length.
- Can be fixed directly to the bumper bar of large trucks.
- Manufactured from an extremely durable and hardwearing EPDM blended natural rubber compound.




IDEAL FOR:

- Loading Bays
- Jetties
- Wharves
- Trucks
- Truck Trailers


BUMPER MOUNTING

All dimensions in millimetres



MOULDED MOUNTING FOOT

BB1001



BUMPER SCREW ON

M17205

FEATURES:

- Solid moulded rubber
- Durable
- Reduces Vibration and Noise
- Hard wearing EPDM rubber

IDEAL FOR:

- Machine mounting legs
- Protecting doors, walls etc
- Truck bumper bars and industrial applications

RUBBER CORNER GUARDS

These high quality, natural rubber corner guards are ideal for use in all manner of car parks, hospitals, schools, shopping centers and factory complexes. They are suitable for various high use areas.

IDEAL FOR:

Providing protection from damage to buildings and vehicles in car parks, loading bays, and storage areas.

| PART No. | Material | Length | Colour |
|----------|----------------------|--------|--------|
| 92141 | Solid Natural Rubber | 165mm | Black |
| 92142 | Solid Natural Rubber | 165mm | Yellow |



RUBBER PILLAR GUARDS

These high quality, natural rubber corner guards are ideal for use in all manner of car parks, hospitals, schools, shopping centers and factory complexes. They are suitable for various high use areas.

IDEAL FOR:

Providing protection from damage to buildings and vehicles in car parks, loading bays, and storage areas.

| PART No. | Material | Length | Colour |
|----------|----------------------|--------|--------|
| 92206 | Solid Natural Rubber | 1000mm | Yellow |
| 92207 | Solid Natural Rubber | 1000mm | Black |



RUBBER TIE DOWN STRAPS

REINFORCED ENDS To ensure hooks do not pull out.



**QUICK GRIP
HOOKS**

Highly stretchable rubber mixed with EPDM

This attractive wall mounted tie down merchandiser saves space, is easily restocked, and can actually help you to generate profits.

The merchandiser measures 380mm x 120mm and is mounted using keyhole slots.

WARNING:

- Do not extend rubber tie down strips beyond their recommended maximum stretch limits.

MERCHANDISERS

| PART No. | Description |
|----------|---------------------------|
| 74-003 | 20 of each of the 4 sizes |
| 74-004 | 30 of each of the 4 sizes |

REPLACEMENT PACKS


| PART No. | Length | Recommended MAX Stretch Length | Pack Quantity |
|------------|--------|--------------------------------|---------------|
| 74-010-10 | 254mm | 330mm | 10 |
| 74-0150-10 | 381mm | 481mm | 10 |
| 74-021-10 | 533mm | 750mm | 10 |
| 74-031-10 | 787mm | 1000mm | 10 |



BLANKING GROMMETS


#Special order only - Minimum order quantities apply

| PART No. | A mm | B mm | C mm | D mm |
|--------------|---------|---------|---------|---------|
| M0034-001 | 12.7 | 1.2 | 7.2 | 9.5 |
| M0039-002 | 20.6 | 1.6 | 7.2 | 17.5 |
| M0041-001 | 54.0 | 1.2 | 6.0 | 47.6 |
| M0041-102 | 57.0 | 1.0 | 6.4 | 35.0 |
| M0058-105 | 57.1 | 1.2 | 9.5 | 44.5 |
| M0115-001 | 17.5 | 1.6 | 6.4 | 12.7 |
| M0128-001 | 19.0 | 1.6 | 6.4 | 14.3 |
| M0129-001 | 38.1 | 1.6 | 8.0 | 31.8 |
| M0159-001 | 11.0 | 1.6 | 4.8 | 8.0 |
| M0160-001 | 25.4 | 1.6 | 6.4 | 19.0 |
| M0161-001 | 20.6 | 1.6 | 6.4 | 16.0 |
| M0171-001 | 16.0 | 1.6 | 6.4 | 11.0 |
| M0194-001 | 31.8 | 1.6 | 0.8 | 25.4 |
| M0228-001 | 25.4 | 0.8 | 8.0 | 14.3 |
| M0240-001 | 28.6 | 1.6 | 6.4 | 22.3 |
| M0251-001 | 58.0 | 1.6 | 7.2 | 36.5 |
| M0261-001 | 33.3 | 1.6 | 8.0 | 27.0 |
| M0273-001 | 44.5 | 1.6 | 8.0 | 38.1 |
| #M0273-001GR | 44.5 | 1.6 | 8.0 | 38.1 |
| M0323-001 | 59.0 | 1.5 | 7.5 | 50.5 |
| M0338-001 | 53.0 | 2.4 | 8.7 | 35.0 |

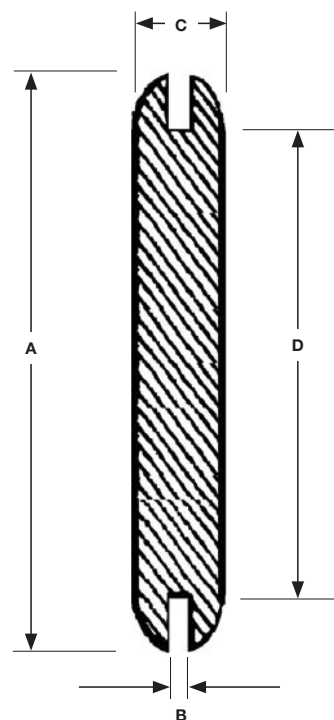

CUSHION CONNECTOR


| PART No. | DURO | A mm | B mm | C mm | D mm | E |
|---------------|------|---------|---------|---------|---------|-------|
| CC1002-40-516 | 40 | 18 | 17 | 18 | 25 | 5/16" |

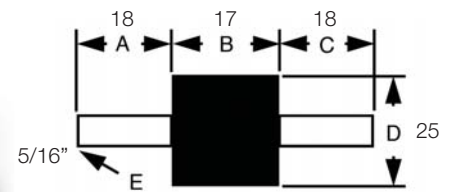


Fine Thread

RUBBER BUSHES


All dimensions in millimeters

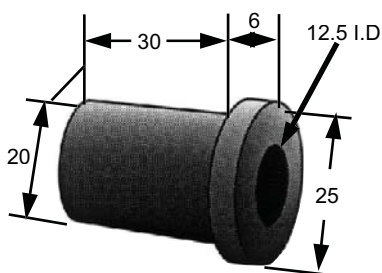

S4001




S4002




S4003

RUBBER BUSHES


All dimensions in millimeters

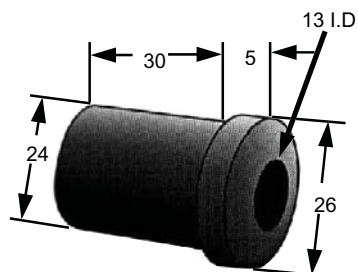


S4004




S4006




S4011

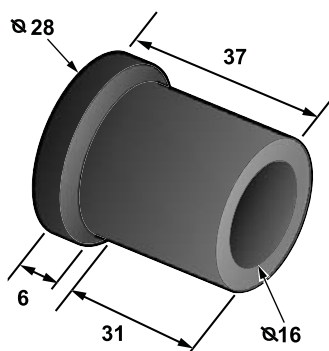


S4013

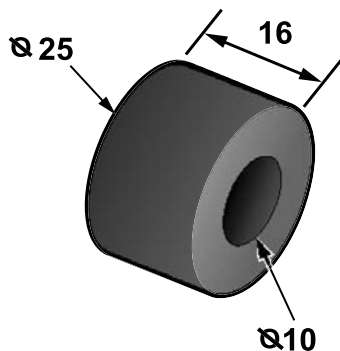


S4021

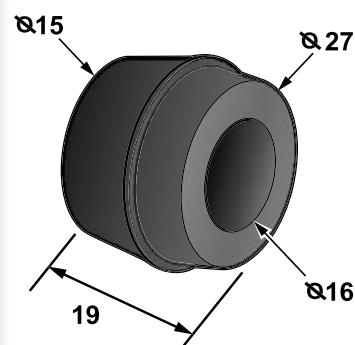

S4025




S4026




U00077

ANTI-RATTLE BUMPERS & GROMMETS


All dimensions in millimeters

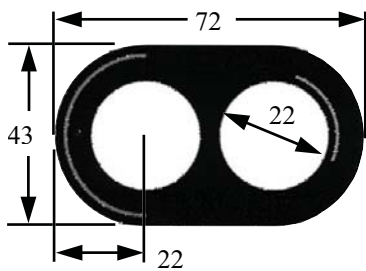


G1020

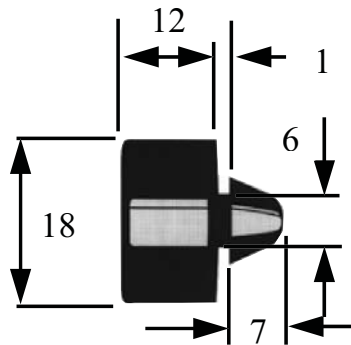


RB1001

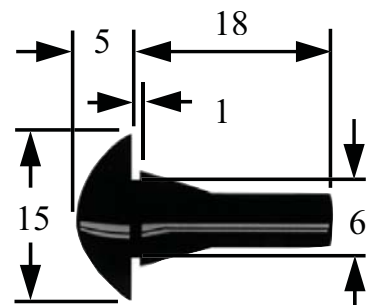


RB1002

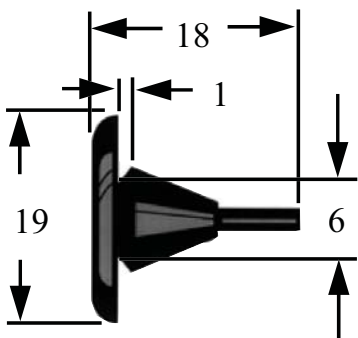


RB1003

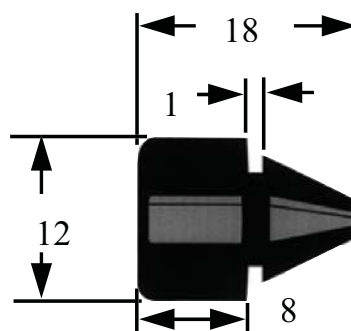


RB1005

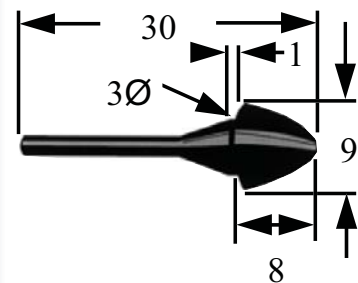


RB1006



RB1007

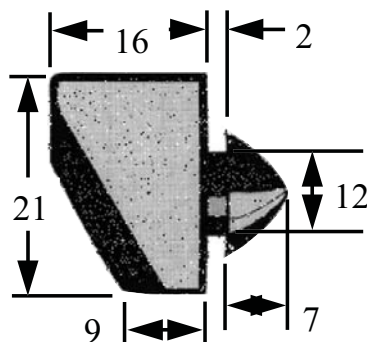










RB1008

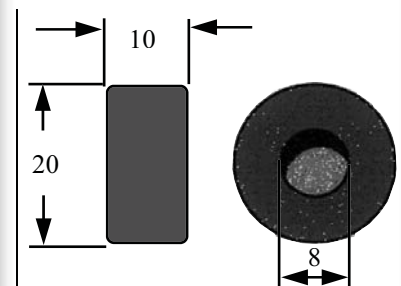

RB1009


ANTI-RATTLE BUMPERS & GROMMETS

All dimensions in millimeters

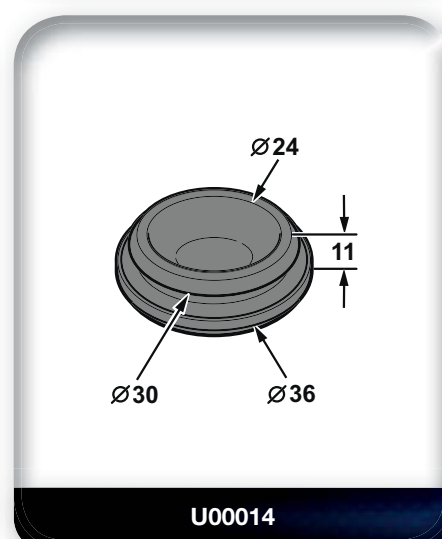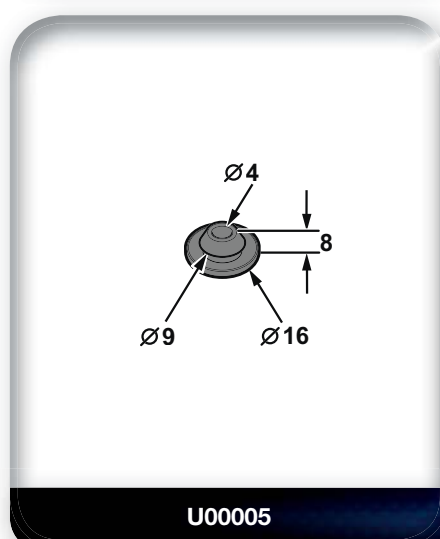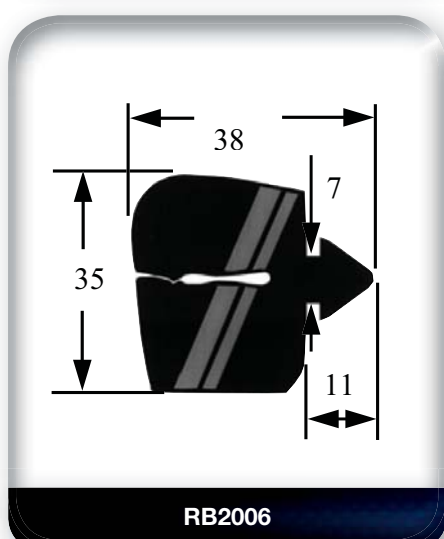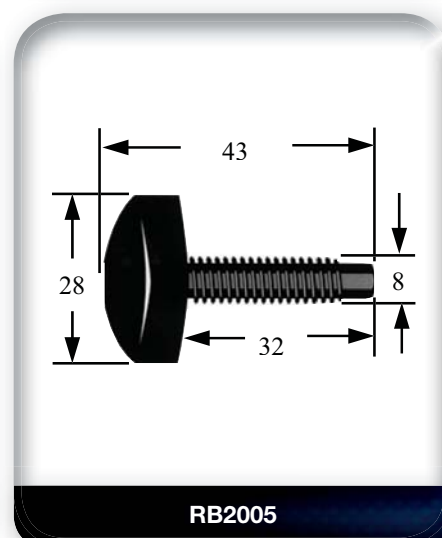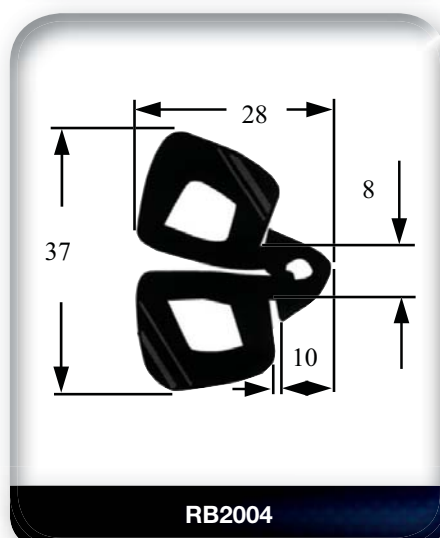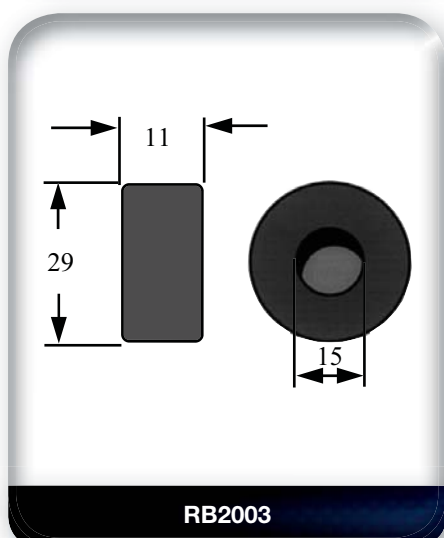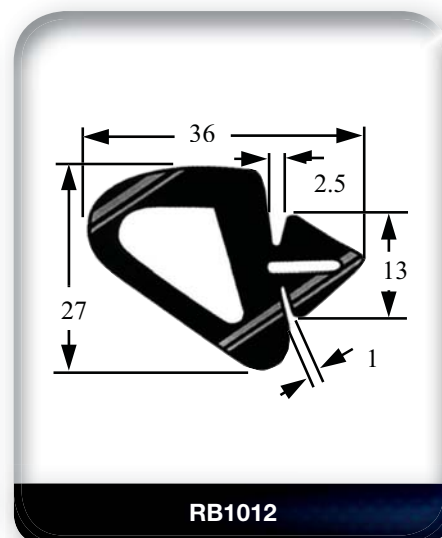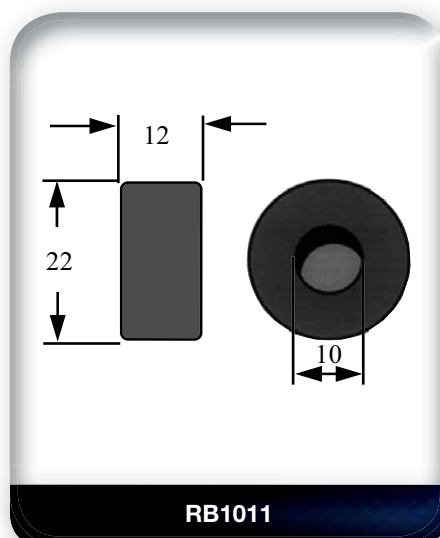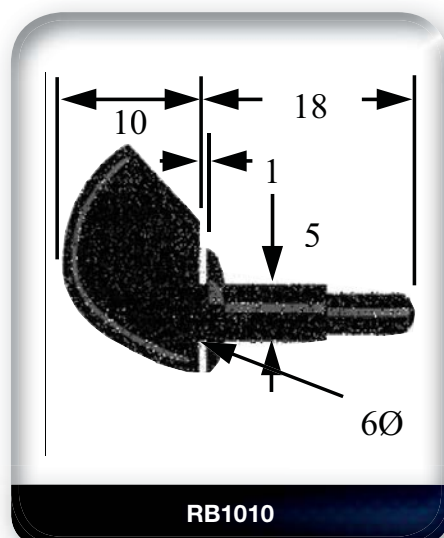


ANTI-RATTLE BUMPERS & GROMMETS


All dimensions in millimeters




U00017




U00066




U00070




U00082




U00103




U00104



U00111




U00112



U00113

ANTI-RATTLE BUMPERS & GROMMETS

All dimensions in millimeters



U00114

Matting



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.





Best Foot Mats

69



Trunk Trays

69



Moulded Ute & Van Mats

70



Universal Fit Ute & Van Mats

71



Anti-Fatigue Mats

72



Universal Rubber Mats

72

BEST FOOT MATS

Packaging: In pairs on a hanging heading card

| PART No. | Description |
|----------|-----------------|
| 52-700-2 | Front Mat Black |
| 52-701-2 | Rear Mat Black |



FEATURES:

- Raised edges eliminate dirt & mud falling from sides like conventional mats
- Easy removal for dirt disposal
- Non-slip underside eliminates mats sliding
- Made from highly durable natural rubber
- Fully washable
- Attractive appearance
- Fits most vehicles

IDEAL FOR:

- Four Wheel Drive
- Utes & Vans
- Council & Government Departments
- Commercial Vehicles
- Passenger Vehicles
- Tradespeople
- Farmers
- Snow Resorts
- Contractors

TRUNK TRAYS

Trunk Trays are high quality, durable rubber mats designed to maintain the cleanliness of a vehicle boot or cargo area and protect against cuts, stains and abrasions to the vehicle carpet.

Ask us about incorporating your company logo into the surface of these mats. They make an excellent accessory to be sold or perfect promotional giveaway. Extra costs may apply.

| PART No. | Description |
|----------|---------------|
| 52-702 | 750mm x 500mm |
| 52-707 | 900mm x 600mm |

FEATURES:

- Non-slip surface prevents items from sliding and rolling
- Heavy duty rubber construction is resistant to fuels, battery acid, paints and household chemicals
- Excellent for home use to protect floors and carpet
- Easily cleaned

IDEAL FOR:

- Four Wheel Drive
- Utes & Vans
- Council & Government Departments
- Commercial Vehicles
- Passenger Vehicles
- Tradespeople
- Farmers
- Snow Resorts
- Contractors



MOULDED UTE & VAN MATS

Para Moulded Ute Mats are made from a durable, UV resistant, fibre re-inforced, natural and synthetic, rubber; moulded to fit the contours of your Ute tray.

The special rubber compound and mat design help prevent your cargo from sliding in any direction, insuring your payload stays in place. Para Moulded Ute mats not only protect your cargo but also help to keep your Ute tray in top condition.

FEATURES

- Made from durable fibre reinforced rubber
- UV Resistant
- Tear, crack & warp resistant
- Resistant to most chemicals and liquids
- Resistant to extreme temperatures
- Skid resistant
- Dimpled under bottom to help prevent water damage and rust
- Custom moulded to suit tray
- Made from natural and synthetic rubber
- Reduces noise



| PART No. | Width & Length |
|----------|--------------------|
| 14105 | W 2420 x L 1850 mm |
| 14306 | W 1310 x L 1910 mm |
| 14307 | W 1460 x L 1820 mm |
| 41104 | W 1500 x L 2260 mm |
| 41105 | W 1500 x L 2260 mm |
| 41107 | W 1560 x L 1380 mm |
| 41113 | W 1500 x L 1670 mm |
| 41114 | W 1520 x L 2330 mm |
| 41115 | W 1520 x L 1820 mm |
| 41116 | W 1520 x L 1540 mm |
| 41207 | W 1444 x L 830 mm |
| 41208 | W 1444 x L 1410 mm |
| 41305 | W 1535 x L 500 mm |
| 41309 | W 1520 x L 1420 mm |
| 41406 | W 1495 x L 1540 mm |
| 41409 | W 1475 x L 1360 mm |
| 41504 | W 1465 x L 1745 mm |
| 41506 | W 1465 x L 1525 mm |
| 41701 | W 1613 x L 2464 mm |
| 41702 | W 1613 x L 1994 mm |
| 41705 | W 1613 x L 1689 mm |

Available in Factory Fleetside Body & Steel / Aluminium Tray.

Mat model 14307 shown above.

| Factory Fleetside Body | | | Steel / Aluminium Tray | | |
|------------------------|--|--|------------------------|--|--|
| | | | | | |

| MAKE | MODEL | MODEL | YEAR RANGE | STANDARD CAB | EXTRA CAB | DUAL CAB | STANDARD CAB | EXTRA CAB | DUAL CAB |
|------------|-----------|-------|------------|--------------|-----------|-------------------|--------------|-----------|----------|
| TOYOTA | HILUX | | 2000-2005 | *41104 | *41105 | *41113 4WD *41107 | | | |
| TOYOTA | HILUX | 692N | 2006-ON | *41114 | *41115 | *41116 | 14105 | 14105 | 14105 |
| TOYOTA | 70 SERIES | 79 | 2005-ON | | | | 14105 | | |
| HOLDEN | COMMODORE | VE | 2007-ON | 14306 | | | | | |
| HOLDEN | RODEO | RA | 2003-ON | | *41207 | *41208 | 14105 | 14105 | 14105 |
| HOLDEN | COLORADO | | 2008-ON | | *41207 | *41208 | | | |
| MITSUBISHI | TRITON | MK | 1998-2005 | | | *41406 | | | |
| MITSUBISHI | TRITON | ML | 2006-2008 | | | *41409 | 14105 | | |
| MAZDA | BT50 | BT50 | 2007-ON | | *41504 | *41506 | 14105 | | |
| FORD | RANGER | | 2007-ON | *41701 | *41702 | *41705 | 14105 | 14105 | 14105 |
| FORD | FALCON | AU-BF | 1999-ON | 14307 | | | 14105 | | |
| NISSAN | NARVARA | D22M | 1999-2006 | | | *41305 | 14105 | | |
| NISSAN | NARVARA | D40 | 2005-ON | | | *41309 | | | |
| NISSAN | PATROL | GU | 2001 - ON | | | | 14105 | | |

* If an accessory tub liner has been fitted, some trimming may be required

Note: Tray back mats may require trimming depending on length and width. Also tray manufacturers sizes may vary slightly for some models.

Note: 14105 Mat only comes in a standard size of 2420mm x 1850mm. This will need to be trimmed to suit aftermarket trays (steel/aluminium).



UNIVERSAL FIT UTE & VAN MATS

These mats are available in five different sizes that can be easily cut to suit individual needs.



FEATURES:

- Made from durable, tear resistant rubber
- Ribbed non-slip surface prevents items from sliding and rolling
- Pimpled underside surface for drainage and condensation prevention
- Easily cut to suit individual needs

IDEAL FOR:

- Four Wheel Drive
- Utes & Vans
- Council & Government Departments
- Commercial Vehicles
- Passenger Vehicles
- Tradespeople
- Farmers
- Snow Resorts
- Contratcors



| PART No. | Description |
|------------------|-----------------------|
| UNI-705R | 1575mm x 2260mm x 5mm |
| UNI-805R | 1550mm x 2440mm x 5mm |
| UNI-806R | 1850mm x 2420mm x 5mm |
| UNI-1005R | 1524mm x 3048mm x 5mm |
| UNI-1006R | 1820mm x 3050mm x 5mm |

ANTI-FATIGUE MATS

FEATURES:

- Ergonomically designed for reduction of back, leg, foot and ankle fatigue
- Promotes employee wellbeing
- Reduces the affect to legs and feet of prolonged exposure to cold, heat and vibration
- Helps reduce spinal compression
- Assists with increasing circulation
- Very user friendly and easy to clean
- Mats are manufactured from hard wearing natural rubber
- Excellent traction surface offers safer footing, even under wet conditions



IDEAL FOR:

- Domestic
- Industrial
- Commercial
- Agriculture
- Hospitality

| PART No. | Description |
|---------------|----------------|
| KM3660 | 1500mm x 900mm |

UNIVERSAL RUBBER MATS

The Universal Rubber Mat is high quality, low cost mat manufactured from a blend of natural and synthetic rubbers. The availability of two sizes make it ideal for a large range of industrial, domestic, marine and automotive uses.

FEATURES:

- Low cost
- High Quality Durable Rubber
- Universal Application

IDEAL FOR:

- Cars
- Trucks
- Domestic
- Industrial
- Marine



| PART No. | Description |
|----------------|---------------|
| 52-501 | 457mm x 609mm |
| 52-5165 | 508mm x 711mm |

Merchandisers



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.



HOSE MERCHANDISER

PART NO: PCH001-G


| Qty | Pack | Part No. | Description | I.D. | | Length m |
|-----|-------|-------------|---------------------|------|-------|-------------|
| | | | | mm | inch | |
| 1 | Spool | 4205095/7M | Brake Vacuum | 9.5 | 11/32 | 7 |
| 1 | Spool | 311T079/7M | Transmission Cooler | 7.9 | 5/16 | 7 |
| 1 | Spool | 3111048/7M | Fuel | 4.8 | 3/16 | 7 |
| 1 | Spool | 3111063/7M | Fuel | 6.3 | 1/4 | 7 |
| 1 | Spool | 3111079/7M | Fuel | 7.9 | 5/16 | 7 |
| 1 | Spool | 3111095/7M | Fuel | 9.5 | 3/8 | 7 |
| 1 | Spool | 3300025/15M | Vacuum & Washer | 2.5 | 7/64 | 15 |
| 1 | Spool | 3300030/15M | Vacuum & Washer | 3 | 1/8 | 15 |
| 1 | Spool | 3300040/15M | Vacuum & Washer | 4 | 5/32 | 15 |
| 1 | Spool | 3300055/15M | Vacuum & Washer | 5.5 | 7/32 | 15 |
| 1 | Spool | 3300063/15M | Vacuum & Washer | 6.3 | 1/4 | 15 |
| 1 | Spool | 5250075/7M | EFI Fuel Hose | 7.9 | 5/16 | 7 |



HEATER HOSE MERCHANDISER

PART NO. PCH002-G

| Qty | Pack | Part No. | I.D. | | Length m |
|-----|------|-------------|------|------|-------------|
| | | | mm | inch | |
| 2 | Box | 4801127/15M | 12.7 | 1/2 | 15 |
| 2 | Box | 4801160/15M | 16 | 5/8 | 15 |
| 2 | Box | 4801191/15M | 19 | 3/4 | 15 |

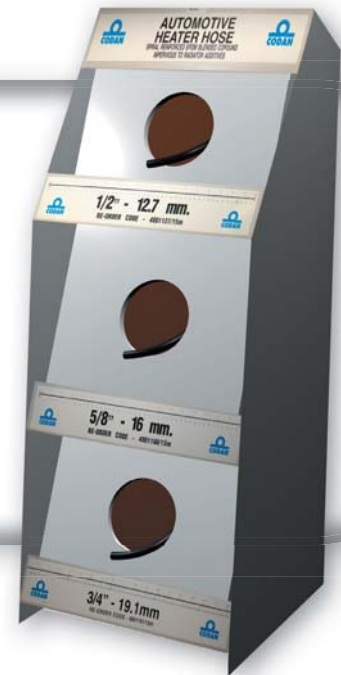

RUBBER TIE DOWN STRAP MERCHANDISER

MERCHANDISERS

| PART No. | Description |
|----------|---------------------------|
| 74-003 | 20 of each of the 4 sizes |
| 74-004 | 30 of each of the 4 sizes |

REPLACEMENT PACKS


| PART No. | Length | Recommended MAX Stretch Length | Pack Quantity |
|------------|--------|--------------------------------|---------------|
| 74-010-10 | 254mm | 330mm | 10 |
| 74-0150-10 | 381mm | 481mm | 10 |
| 74-021-10 | 533mm | 750mm | 10 |
| 74-031-10 | 787mm | 1000mm | 10 |



RSP MERCHANDISER

PART NO. RSPMERCH

| Qty | Part No. | Description |
|-----|----------------|--|
| 1 | 74-003 | MERCHANDISER TIE DOWN STRAP NEW TYPE 20X4 SIZES |
| 1 | 92206 | RUBBER PILLAR GUARD YELLOW 1 METER LONG |
| 1 | 92207 | RUBBER PILLAR GUARD BLACK 1 METER LONG |
| 1 | 92141 | RUBBER CORNER GUARD BLACK 17CM LONG |
| 1 | 92142 | RUBBER CORNER GUARD YELLOW 17CM LONG |
| 1 | B57601 | BUFFER HEAVY DUTY PRE DRILLED 55 X 195 X 50MM |
| 1 | B45001 | BUFFER HEAVY DUTY PRE DRILLED 197MM |
| 1 | B5500 | BUFFER HEAVY DUTY PRE DRILLED 150MM |
| 1 | BB1001 | MOULDED MOUNTING FOOT 60MM PRE DRILLED |
| 1 | DR300 | MOULDED DOCKING RUBBER 110MM X 90MM X 300MM LONG |
| 1 | B5540 | BUFFER HEAVY DUTY PRE DRILLED 65 X 155 X 75MM |
| 1 | DR1000 | MOULDED DOCKING BUFFER 110MM X 90MM X 1000MM |
| 1 | SSK | SPONGE SAMPLE KIT |
| 1 | PSK | PINCHWELD SAMPLE KIT |
| 1 | FSK | FLOCKING SAMPLE KIT |
| 1 | HSK | KIT SAMPLE HOSE |
| 2 | WC1086 | WHEEL CHOCK RUBBER H/DUTY 250L X 200W X 160H |
| 2 | WC2556A | WHEEL CHOCK RUBBER LARGE 260L X 180W X 210H |
| 2 | WC3783 | WHEEL CHOCK RUBBER H/DUTY 300L X 300W X 260H |
| 2 | WC24483 | WHEEL CHOCK - TETHERED (2 PIECE) |
| 2 | WC1468A | WHEEL CHOCK RUBBER MEDIUM 205L X 205W X 105H |
| 1 | SM1 | SMALL SAMPLE MAT |
| 2 | WC1467A | WHEEL CHOCK RUBBER SMALL 205L X 130W X 100H |

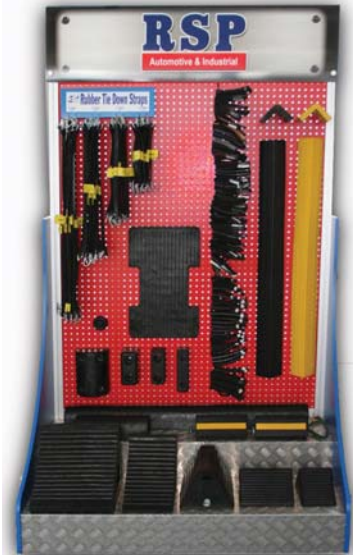

Enquire within for more information

Clips & Fasteners



*Please note: RSP Reserves the right to alter designs & dimensions without notice. At the time of printing this catalogue, all products are available, however this may change without notice.



RSP offers a wide range of clips and fasteners to suit a variety of applications. Contact our sales team for an up to the minute update of our extensive product range.

CLIPS TONNEAU

CLIP BADGE RETAINER PUSH IN TYPE

CLIPS & FASTENERS BUMPER BAR

CLIPS & FASTENERS ELECTRICAL

CLIPS & FASTENERS GRILLE

CLIPS & FASTENERS PUSH IN TYPE

CLIPS & FASTENERS SPRING TAIL

CLIPS & FASTENERS WINDSCREEN

CLIPS & FASTENERS XMAS TREE

CLIPS & FASTENERS WEATHERSTRIPS

CLIPS INTERIOR PUSH IN CANOE TYPE

CLIP MOULDING PUSH IN LOCK TYPE

CLIPS & FASTENERS TRIM

CLIP MOULDING PUSH IN PLASTIC

CLIP MOULDING PUSH IN SPRING TYPE

CLIP MOULDING SCREW/ RIVET ON TYPE

CLIP PLATE AND STUD TYPE

CLIPS BODY MOULDIN STEEL SCREW ON

CLIP WIRING ,PIPING AND CABLES

CLIPS FOR DOOR TRIM

BOLT ALLEN HEAD

SCREW GROMMETS

SCRIVET FASTENERS

NUTS HEX SPEED TYPE

NUTS SPEED FLAT SPRING TYPE

WASHER FLAT TYPE

WASHER SPRING TYPE

WASHERS STAR TYPE

CLAMPS

MISCELLANEOUS

NUTS "J" TYPE

BOLT HEX HEAD MACHINE

NUTS "U" TYPE

BOLT HEX HEAD WITH WASHER

CLIPS DOOR / ACCELERATOR

CLIP CIRCLIP, SNAP RING & SPRING RETAINER

WASHERS CUPPED

SELF TAPPER HEX HEAD

NUT SPEED ROUND PUSH ON

NUT HEX LOCK

SCREW MACHINE FLAT HEAD

SCREW MACHINE TRUSS HEAD

SCREW SELF TAPPER FLAT HEAD

SCREW GRUB

SCREW MACHINE WASHER HEAD

SCREW MACHINE OVAL HEAD

MANIFOLD STUDS

RETAINER SPRING PIN

HAIR PIN COTTER

NUT HEX FLANGE SERRATED

SCREW SELF TAPPER OVAL HEAD

SCREW SELF TAPPER PAN HEAD

NUTS HEX

SCREW FILLISTER HEAD

SCREW MACHINE PAN HEAD

RIVETS

QUICK FIND INDEX

| | | | | | | | |
|------------|----|--------------------|----|-------------------|----|--------------------|----|
| 512..... | 20 | 92207..... | 78 | 3300045/15M | 41 | 39-671 | 23 |
| 520..... | 20 | 92608..... | 57 | 3300055/15M | 41 | 39-8517R..... | 25 |
| 530..... | 20 | 92609..... | 57 | 3300055/15M | 48 | 39-8785 | 31 |
| 539..... | 20 | 92610..... | 57 | 3300055/15M | 76 | 39-8799 | 17 |
| 542..... | 20 | 92611..... | 57 | 3300063/15M | 41 | 39-8801 | 23 |
| 550..... | 20 | 1059-779 | 25 | 3300063/15M | 48 | 39-8802 | 23 |
| 559..... | 20 | 1204-929 | 25 | 3300063/15M | 76 | 39-8803 | 23 |
| 566..... | 21 | 12-105R..... | 16 | 3300079/15M | 42 | 39-8804 | 23 |
| 568..... | 20 | 2601120/20M | 43 | 3300095/15M | 42 | 39-8805 | 23 |
| 575..... | 21 | 2601170/20M | 43 | 39-037R..... | 30 | 39-8806 | 23 |
| 647..... | 21 | 2601190/20M | 43 | 39-068R..... | 30 | 39-8807 | 23 |
| 648..... | 21 | 2601250/20M | 43 | 39-069R..... | 30 | 39-8824 | 23 |
| 649..... | 21 | 31-025 | 30 | 39-089R..... | 16 | 39-8838 | 23 |
| 676..... | 21 | 31-044R..... | 16 | 39-092R..... | 16 | 39-8840 | 17 |
| 704..... | 21 | 3111048/30M | 38 | 39-144R..... | 16 | 39-8841 | 17 |
| 776..... | 21 | 3111048/7M | 38 | 39-159R..... | 16 | 39-8842 | 19 |
| 778..... | 21 | 3111048/7M | 48 | 39-178R..... | 21 | 39-8846 | 25 |
| 779..... | 25 | 3111048/7M | 76 | 39-236R..... | 16 | 39-8848 | 30 |
| 781..... | 21 | 3111063/100M | 38 | 39-316R..... | 16 | 4205095/30M | 43 |
| 904..... | 21 | 3111063/30M | 38 | 39-335R..... | 22 | 4205095/7M | 43 |
| 921..... | 21 | 3111063/7M | 38 | 39-358R..... | 22 | 4205095/7M | 48 |
| 928..... | 25 | 3111063/7M | 48 | 39-399R..... | 16 | 4205095/7M | 76 |
| 929..... | 25 | 3111063/7M | 76 | 39-401 | 30 | 4205120/30M | 43 |
| 934..... | 21 | 3111079/100M | 38 | 39-416R..... | 16 | 4205120/7M | 43 |
| 1032..... | 21 | 3111079/30M | 38 | 39-424 | 30 | 43-029AR..... | 23 |
| 1130..... | 21 | 3111079/7M | 38 | 39-426 | 30 | 4801050/30M | 40 |
| 14105..... | 72 | 3111079/7M | 48 | 39-478R..... | 16 | 4801080/30M | 40 |
| 14306..... | 72 | 3111079/7M | 76 | 39-480R..... | 16 | 4801095/100M | 40 |
| 14307..... | 72 | 3111095/100M | 38 | 39-497R..... | 16 | 4801095/25M | 40 |
| 41104..... | 72 | 3111095/30M | 38 | 39-499R..... | 16 | 4801095/50M | 40 |
| 41105..... | 72 | 3111095/7M | 38 | 39-500 | 30 | 4801127/100M | 40 |
| 41107..... | 72 | 3111095/7M | 48 | 39-501 | 30 | 4801127/15M | 40 |
| 41113..... | 72 | 3111095/7M | 76 | 39-502 | 30 | 4801127/15M | 49 |
| 41114..... | 72 | 3111110/100M | 38 | 39-520R..... | 22 | 4801127/15M | 77 |
| 41115..... | 72 | 3111110/30M | 38 | 39-527R..... | 22 | 4801127/50M | 40 |
| 41116..... | 72 | 3111110/7M | 38 | 39-544R..... | 22 | 4801160/100M | 40 |
| 41207..... | 72 | 3111127/30M | 38 | 39-557R..... | 22 | 4801160/15M | 40 |
| 41208..... | 72 | 3111127/7M | 38 | 39-558R..... | 22 | 4801160/15M | 49 |
| 41305..... | 72 | 311T079/100M | 41 | 39-559R..... | 22 | 4801160/15M | 77 |
| 41309..... | 72 | 311T079/30M | 41 | 39-560R..... | 22 | 4801160/50M | 40 |
| 41406..... | 72 | 311T079/7M | 41 | 39-561R..... | 22 | 4801191/15M | 40 |
| 41409..... | 72 | 311T079/7M | 48 | 39-562R..... | 22 | 4801191/15M | 49 |
| 41504..... | 72 | 311T079/7M | 76 | 39-589 | 22 | 4801191/15M | 77 |
| 41506..... | 72 | 311T095/100M | 41 | 39-590 | 22 | 4801191/50M | 40 |
| 41701..... | 72 | 311T095/30M | 41 | 39-591 | 22 | 506055/15M | 40 |
| 41702..... | 72 | 311T095/7M | 41 | 39-592 | 16 | 506075/15M | 40 |
| 41705..... | 72 | 32-006 | 30 | 39-593 | 16 | 506095/15M | 40 |
| 92139..... | 55 | 3300025/15M | 41 | 39-594 | 17 | 51-004-992..... | 25 |
| 92140..... | 55 | 3300025/15M | 48 | 39-607 | 17 | 5130079/30M | 44 |
| 92141..... | 60 | 3300025/15M | 76 | 39-615 | 17 | 5130079/7M | 44 |
| 92141..... | 78 | 3300030/15M | 41 | 39-618 | 17 | 5130100/30M | 44 |
| 92142..... | 60 | 3300030/15M | 48 | 39-622 | 30 | 5130100/7M | 44 |
| 92142..... | 78 | 3300030/15M | 76 | 39-628 | 30 | 51-444 | 34 |
| 92206..... | 60 | 3300040/15M | 41 | 39-668 | 17 | 51-462 | 34 |
| 92206..... | 78 | 3300040/15M | 48 | 39-669 | 22 | 51-638 | 23 |
| 92207..... | 60 | 3300040/15M | 76 | 39-670 | 23 | 51-903 | 30 |

| | | | | | | | |
|--------------------------|----|-----------------------|----|---------------------|----|-----------------------|----|
| 51-992 | 22 | 66-012 | 11 | A-125 | 33 | HFZ6 | 45 |
| 5250075/30M | 39 | 66-013 | 11 | A-126 | 33 | HFZ8 | 45 |
| 5250075/7M | 39 | 66-014 | 11 | A-127 | 33 | HHZ10 | 45 |
| 5250075/7M | 48 | 66-015 | 11 | A-131 | 33 | HHZ12 | 45 |
| 5250075/7M | 76 | 66-016 | 12 | A-132 | 33 | HHZ16 | 45 |
| 5250095/30M | 39 | 66-017 | 12 | A-133 | 33 | HHZ6 | 45 |
| 5250095/7M | 39 | 66-018 | 12 | A-134 | 33 | HHZ8 | 45 |
| 52-501 | 74 | 66-020 | 12 | A-135 | 33 | HSEAL15 | 24 |
| 52-5165 | 74 | 66-022 | 12 | A-136 | 33 | HSEAL20 | 24 |
| 52-700-2 | 71 | 66-035 | 14 | A-137 | 33 | HSEAL25 | 24 |
| 52-701-2 | 71 | 66-037 | 14 | A-141 | 33 | HSK | 78 |
| 52-702 | 71 | 66-040 | 12 | A-142 | 33 | HUMP-B | 56 |
| 52-707 | 71 | 66-052 | 12 | A-143 | 33 | HUMP-END-B | 56 |
| 60-051SCH | 13 | 66-056 | 12 | A-144 | 33 | HUMP-END-Y | 56 |
| 60-052SCH | 13 | 66-057 | 12 | A-145 | 33 | HUMP-Y | 56 |
| 60-053SCH | 13 | 66-060 | 12 | A-146 | 33 | K120 | 31 |
| 60-054 (black) | 14 | 66-083 (black) | 14 | A-147 | 33 | K146 | 31 |
| 60-054R | 11 | 66-084 (black) | 15 | B45001 | 58 | K150 (mylar) | 31 |
| 60-055N (black) | 14 | 66-115 | 12 | B45001 | 78 | K150BL (rubber) | 31 |
| 60-055R | 11 | 66-137 | 12 | B5500 | 58 | K410 | 31 |
| 60-056B (black) | 14 | 66-157 | 12 | B5500 | 78 | K540 | 31 |
| 60-057SCH | 13 | 66-173 (black) | 15 | B5540 | 58 | K960 | 31 |
| 60-058 (black) | 14 | 66-176 (grey) | 15 | B5540 | 78 | KM3660 | 74 |
| 60-059 (black) | 14 | 66-8295 (black) | 15 | B57601 | 58 | M0034-001 | 62 |
| 60-063 (black) | 14 | 66-8296 (white) | 15 | B57601 | 78 | M0039-002 | 62 |
| 60-800 (camel) | 14 | 66-8325 (grey) | 15 | BB1001 | 59 | M0041-001 | 62 |
| 60-801 (charcoal) | 14 | 74-003 | 61 | BB1001 | 78 | M0041-102 | 62 |
| 60-802 (blue/grey) | 14 | 74-003 | 77 | C313 | 28 | M0058-105 | 62 |
| 60-806 (Gazelle) | 14 | 74-003 | 78 | C52FLT | 29 | M0115-001 | 62 |
| 60-807 | 14 | 74-004 | 61 | CC1002-40-516 | 63 | M0128-001 | 62 |
| 60-8757 | 19 | 74-004 | 77 | DR1000 | 59 | M0129-001 | 62 |
| 60-8758 | 19 | 74-010-10 | 61 | DR1000 | 78 | M0159-001 | 62 |
| 60-8759 | 19 | 74-010-10 | 77 | DR300 | 59 | M0160-001 | 62 |
| 60-A01 | 17 | 74-0150-10 | 61 | DR300 | 78 | M0161-001 | 62 |
| 60-A02 | 17 | 74-0150-10 | 77 | ESEAL19 | 24 | M0171-001 | 62 |
| 60-A12 | 17 | 74-021-10 | 61 | ESEAL35 | 24 | M0194-001 | 62 |
| 60-B01 | 17 | 74-021-10 | 77 | F17365 | 32 | M0228-001 | 62 |
| 60-B03 | 17 | 74-031-10 | 61 | F17365W | 32 | M0240-001 | 62 |
| 60-B05 | 17 | 74-031-10 | 77 | FJ001 | 25 | M0251-001 | 62 |
| 60-B06 | 17 | 778-779 | 25 | FJ002 | 25 | M0261-001 | 62 |
| 60-B13 | 17 | 77-976 | 32 | FJ121- (S184) | 18 | M0273-001 | 62 |
| 60-D06 | 18 | 928-929 | 25 | FSK | 78 | M0273-001GR | 62 |
| 64-017 | 30 | A-101 | 33 | FX001 | 25 | M0323-001 | 62 |
| 64-020 | 31 | A-102 | 33 | FX002 | 25 | M0338-001 | 62 |
| 64-026 | 30 | A-103 | 33 | G1020 | 65 | M17205 | 59 |
| 64-067 | 30 | A-104 | 33 | G124 (S315) | 18 | MA3 | 26 |
| 64-139 | 31 | A-105 | 33 | H251T040/25M | 42 | MA4 | 27 |
| 64-143 | 30 | A-106 | 33 | H251T060/25M | 42 | MDB001 | 30 |
| 64-153 | 30 | A-107 | 33 | H251T100/25M | 42 | MR260X | 27 |
| 64-193 (4018701) | 30 | A-111 | 33 | H251T120/25M | 42 | P138 (S151) | 20 |
| 66-002 | 11 | A-112 | 33 | H533063/7M | 39 | P142 (S137) | 20 |
| 66-003 | 11 | A-113 | 33 | H533079/7M | 39 | P143 | 20 |
| 66-004 | 11 | A-114 | 33 | H533095/7M | 39 | P144 (S546) | 20 |
| 66-005 | 11 | A-115 | 33 | H533127/7M | 39 | P216 (S548) | 20 |
| 66-006 | 11 | A-116 | 33 | HFEZ10 | 45 | P219 | 20 |
| 66-007 | 11 | A-117 | 33 | HFEZ12 | 45 | P398 (S156) | 19 |
| 66-008 | 11 | A-121 | 33 | HFEZ6 | 45 | P399 (S165) | 19 |
| 66-009 | 11 | A-122 | 33 | HFEZ8 | 45 | P400 | 19 |
| 66-010 | 11 | A-123 | 33 | HFZ10 | 45 | P401 (S130) | 19 |
| 66-011 | 11 | A-124 | 33 | HFZ12 | 45 | P402 (S163) | 19 |

| | | | | | | | |
|-------------------|----|--------------------------|----|--------------------|----|-----------------|----|
| P403 (S179) | 19 | PCHNB35 | 44 | S4025 | 64 | U00114 | 68 |
| P404 | 19 | PCHNB37 | 44 | S4026 | 64 | UNI-1005R | 73 |
| P405 (S186) | 19 | PCHNB38 | 44 | S544 | 19 | UNI-1006R | 73 |
| P406 (S150) | 19 | PCHNB9 | 44 | S547 | 19 | UNI-705R | 73 |
| P407 | 19 | PCHUB10 | 45 | S551 | 19 | UNI-805R | 73 |
| P408 (S512) | 19 | PCHUB8 | 45 | SM1 | 78 | UNI-806R | 73 |
| P409 | 19 | PSEAL10 | 24 | SOH16 | 47 | VC14 | 46 |
| P410 | 19 | PSEAL12 | 24 | SOH22 | 47 | VC18 | 46 |
| P411 (S135) | 19 | PSEAL16 | 24 | SOH25 | 47 | VC316 | 46 |
| P412 (S168) | 19 | PSEAL18 | 24 | SOH28 | 47 | VC516 | 46 |
| P413 | 19 | PSEAL20 | 24 | SOH32 | 47 | WC1086 | 53 |
| P414 | 19 | PSEAL25 | 24 | SOH35 | 47 | WC1086 | 78 |
| P415 (S162) | 19 | PSEAL29 | 24 | SOH38 | 47 | WC1087 | 53 |
| P416 | 19 | PSK | 78 | SOH42 | 47 | WC1088 | 53 |
| P417 | 19 | RB1001 | 65 | SOH45 | 47 | WC1089 | 53 |
| P422 | 19 | RB1002 | 65 | SOH50 | 47 | WC12 | 46 |
| P423 (S400) | 19 | RB1003 | 65 | SOH54 | 47 | WC12A | 46 |
| P424 | 19 | RB1005 | 65 | SOH57 | 47 | WC12B | 46 |
| P425 | 19 | RB1006 | 65 | SOH60 | 47 | WC1467A | 53 |
| P426 | 19 | RB1007 | 65 | SOH63 | 47 | WC1467A | 78 |
| P427 (S529) | 19 | RB1008 | 65 | SOH70 | 47 | WC1468A | 53 |
| P428 | 19 | RB1009 | 65 | SOH76 | 47 | WC1468A | 78 |
| P429 (S382) | 19 | RB1010 | 66 | SOH83 | 47 | WC24483 | 53 |
| P431 | 19 | RB1011 | 66 | SOH89 | 47 | WC24483 | 78 |
| P433 | 19 | RB1012 | 66 | SRH16 | 47 | WC2556A | 53 |
| P463 | 19 | RB2003 | 66 | SRH22 | 47 | WC2556A | 78 |
| P466 | 19 | RB2004 | 66 | SRH25 | 47 | WC34 | 46 |
| P467 (S169) | 19 | RB2005 | 66 | SRH28 | 47 | WC34A | 46 |
| P472 | 19 | RB2006 | 66 | SRH32 | 47 | WC34B | 46 |
| P473 | 19 | RBP-12 | 46 | SRH35 | 47 | WC3783 | 53 |
| P476 | 19 | RBP-14 | 46 | SRH38 | 47 | WC3783 | 78 |
| P478 | 19 | RBP-18 | 46 | SRH42 | 47 | WC38 | 46 |
| P479 | 19 | RBP-316 | 46 | SRH45 | 47 | WC38B | 46 |
| P484 | 19 | RBP-34 | 46 | SRH50 | 47 | WC58 | 46 |
| P485 (S146) | 19 | RBP-38 | 46 | SRH54 | 47 | WC58A | 46 |
| P487 (S321) | 19 | RBP-516 | 46 | SRH57 | 47 | WC58B | 46 |
| P488 (S183) | 19 | RBP-58 | 46 | SRH60 | 47 | Y526 | 28 |
| P489 | 20 | RD1000 | 31 | SRH63 | 47 | Y619P | 28 |
| P495 (S160) | 19 | RD50 | 31 | SRH70 | 47 | Y620 | 28 |
| P496 (S164) | 19 | RHPB001 | 54 | SRH76 | 47 | Y630P | 28 |
| P497 (S167) | 19 | RHPB004 | 54 | SRH83 | 47 | Y658X | 28 |
| P498 (S158) | 20 | RHPM005 | 54 | SRH89 | 47 | YM108X | 26 |
| P499 (S161) | 19 | RHPP003 | 54 | SS1150 - 30M | 30 | YM3 | 26 |
| P500 (S136) | 19 | RHPT002 | 54 | SSK | 78 | YM54R | 26 |
| P501 (S157) | 19 | RS1119A (no clips) | 18 | TS40 | 34 | YMR13X | 26 |
| P502 (S154) | 19 | RSC97 | 18 | TS50 | 34 | YMR219 | 26 |
| P503 (S131) | 19 | S125 | 18 | U00005 | 66 | | |
| P504 (S141) | 19 | S126 | 18 | U00014 | 66 | | |
| P505 (S526) | 19 | S147 | 18 | U00017 | 67 | | |
| P506 (S166) | 19 | S185 | 18 | U00066 | 67 | | |
| P507 (S152) | 19 | S4001 | 63 | U00070 | 67 | | |
| P545 | 19 | S4002 | 63 | U00077 | 64 | | |
| P546 | 19 | S4003 | 63 | U00082 | 67 | | |
| PCHNB13 | 44 | S4004 | 64 | U00103 | 67 | | |
| PCHNB16 | 44 | S4006 | 64 | U00104 | 67 | | |
| PCHNB19 | 44 | S4011 | 64 | U00111 | 67 | | |
| PCHNB22 | 44 | S4013 | 64 | U00112 | 67 | | |
| PCHNB25 | 44 | S4021 | 64 | U00113 | 67 | | |



RSP AUTOMOTIVE & INDUSTRIAL PTY LTD
(Incorporating Rare Spares)

20-22 Truck City Drive, Campbellfield, Vic 3061, Australia

PHONE: +61 3 9305 4000

FAX: +61 3 9305 3520

EMAIL: rsp@rsp.net.au

www.rsp.net.au